aiwa SERVICE

XR-M130 HR
XR-M150 K
XR-M151 EZ
XR-M152 EZ

SERVICE MANUAL

COMPACT DISC
STEREO SYSTEM

BASIC CD MECHANISM: 3ZG-3 E2NF
BASIC TAPE MECHANISM: 2ZM-1 R8NF

• Replace this Service manual with “Revision Publishing” when it is issued.

aiwa

S/M Code No. 09-005-426-2T2

SIMPLE DATA

ELECTRICAL MAIN PARTS LIST - 1/6

NOTE: The characters in the suffix column indicate the part usage.

```
HRSF ....................XX.........................................D.............
K .......................XX.........................................E.............
151EZ ...................XX.........................................F.............
152EZ ...................XX.........................................G.............
```

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 305	87-010-246-040	0E	CAP,E 47-35 SME	AB.....
C 304	87-010-405-040		CAP,E 10-50	ABCDEFG.....
C 307	87-010-421-040		CAP,E 4.7-50 5L	ABCDEFG.....
C 308	87-010-421-040		CAP,E 4.7-50 5L	ABCDEFG.....
C 309	87-010-787-080		CAP, U 0.022-25	ABCDEFG.....
C 301	87-012-145-080		CAP, CHIP S 270P CH	..CDEFG.....
C 300	87-012-153-080		C-CAP,S 120P-50 CH	..CDEFG.....
C 305	87-A10-797-040		CAP,E 47-35 M 5L SRM	..CDEFG.....
C 313	87-010-112-040		CAP,E 100-16	ABCDEFG.....
C 315	87-010-198-080		CAP, CHIP 0.022	ABCDEFG.....
C 317	87-010-787-080		CAP, U 0.022-25	ABCDEFG.....
C 316	87-012-286-080		CAP, U 0.01-25	ABCDEFG.....
C 314	87-A10-189-040		CAP,E 220-10	ABCDEFG.....
C 329	87-010-198-080		CAP, CHIP 0.022	ABCDEFG.....
C 328	87-010-320-080		CHIP CAP 68P	ABCDEFG.....
C 331	87-010-312-080		C-CAP,S 15P-50 CH	ABCDEFG.....
C 335	87-010-316-080		C-CAP,S 33P-50 CH	ABCDEFG.....
C 333	87-010-401-040		CAP,E 1-50 SME	ABCDEFG.....
C 341	87-010-263-040		CAP,E 100-10	..CDEFG.....
C 341	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C 352	87-010-194-080		CAP, CHIP 0.047	ABCDEFG.....
C 399	87-010-314-080		C-CAP,S 22P-50V	..CDEFG.....
C 397	87-012-154-080		C-CAP,S 150P-50 CH	..CDEFG.....
C 395	87-012-154-080		C-CAP,S 150P-50 CH	..CDEFG.....
C 400	87-012-154-080		C-CAP,S 150P-50 CH	..CDEFG.....
C 420	87-010-196-080		CHIP CAPACITOR,0.1-25	ABCDEFG.....
C 422	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C 421	87-010-318-080		C-CAP,S 47P-50 CH	ABCDEFG.....
C 423	87-010-403-040		CAP,E 3.3-50 SME	..CDEFG.....
C 423	87-010-408-040	0E	CAP,E 47-50 SME	AB.....
CN 4	87-099-032-010		CONN,15P 6216 H	ABCDEFG.....
CN 301	87-099-720-010		CONN,30P TYK-B(P)	ABCDEFG.....
CN 302	87-CL4-704-010		CONN ASSY 9P DECK	ABCDEFG.....
D 309	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D 316	87-001-731-080		ZENER,HZS6C2L	..CDEFG.....
D 316	87-A40-749-080	0E	ZENER,UZ5.6BSB	AB.....
D 331	87-020-027-080		CHIP-DIODE 1SS184	ABCDEFG.....
FL 301	8A-CL9-682-010		FL,ACL-9	ABCDEFG.....
GFL 1	82-NF7-210-110		GUIDE,FL (*)	ABCDEFG.....
IC 303	87-A20-914-010		IC,SPS-442-1-F	ABCDEFG.....
IC 301	8A-CL9-681-010		C-IC,M38B57MCH-XXXXFP	ABCDEFG.....
JW 472	87-A90-896-080		F-BEAD, 035600STY7	ABCDEFG.....
LED 301	87-A40-229-040		LED,SLR-342VR TB7 RED	ABCDEFG.....
LED 305	87-A40-619-040		LED,SLR-56PT-T31-W GRN	ABCDEFG.....
LED 302	87-A40-619-040		LED,SLR-56PT-T31-W GRN	ABCDEFG.....
LED 304	87-A40-619-040		LED,SLR-56PT-T31-W GRN	ABCDEFG.....
LED 303	87-A40-619-040		LED,SLR-56PT-T31-W GRN	ABCDEFG.....
PR 301	87-026-689-080		PROTECTOR,1A 60V 491	A.CDEFG.....
PR 301	87-A91-153-080		FUSE,630MA 125V 251	.B.....
Q 301	87-026-245-080		TR,DTC114ES	ABCDEFG.....
Q 309	89-111-624-080		TR,2SA1162Y	ABCDEFG.....
Q 302	89-112-965-080		TR,2SA1296 (0.75W)	ABCDEFG.....
Q 313	87-026-235-080		CHIP-TR,DTC114EK	ABCDEFG.....
Q 314	87-026-610-080		TR,KTC3198GR	ABCDEFG.....
Q 316	87-A30-074-080		C-TR,RT1P 141C	ABCDEFG.....
Q 315	87-A30-074-080		C-TR,RT1P 141C	ABCDEFG.....
Q 310	87-A30-076-080		C-TR,2SC3052F	ABCDEFG.....
Q 312	89-327-125-080		CHIP TR,2SC2712GR	ABCDEFG.....
Q 400	87-A30-087-080		C-FET,2SK2158	ABCDEFG.....
Q 401	87-A30-087-080		C-FET,2SK2158	ABCDEFG.....
S 315	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 313	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 312	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 318	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 311	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 317	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 314	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 316	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 320	87-A90-095-080		SW,TACT EVQ11G04M	ABCDEFG.....
S 351	87-A91-690-010		SW,RTRY JOG RE0121PVB25FINB	ABCDEFG.....
X 302	87-030-364-010	1A	VIB,XTAL 32.768K CT	AB.....
X 301	87-030-375-080		VIB,CF 4.19MG200	ABCDEFG.....
	87-067-579-010		TAPPING SCREW, BVT2+3-8	ABCDEFG.....
C 209	87-010-186-080		CAP,CHIP 4700P	ABCDEFG.....
C 208	87-010-546-080		CAP, ELECT 0.33-50V	ABCDEFG.....
C 207	87-010-546-080		CAP, ELECT 0.33-50V	ABCDEFG.....
C 210	87-010-186-080		CAP,CHIP 4700P	ABCDEFG.....
C 219	87-010-196-080		CHIP CAPACITOR,0.1-25	ABCDEFG.....

ELECTRICAL MAIN PARTS LIST - 2/6

C	214	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	213	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	211	87-010-403-080		CAP, ELECT 3.3-50V	ABCDEFG.....
C	212	87-010-403-080		CAP, ELECT 3.3-50V	ABCDEFG.....
C	217	87-010-993-080		C-CAP,S 0.056-25 B	ABCDEFG.....
C	218	87-010-993-080		C-CAP,S 0.056-25 B	ABCDEFG.....
C	222	87-010-189-080		C-CAP,S 8200P-50 B	....EFG.....
C	221	87-010-189-080		C-CAP,S 8200P-50 B	....EFG.....
C	220	87-010-196-080		CHIP CAPACITOR,0.1-25	ABCDEFG.....
C	227	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	229	87-012-156-080		C-CAP,S 220P-50 CH	ABCDEFG.....
C	230	87-012-156-080		C-CAP,S 220P-50 CH	ABCDEFG.....
C	261	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	276	87-010-178-080		CHIP CAP 1000P	....EFG.....
C	274	87-012-145-080		CAP, CHIP S 270P CH	....EFG.....
C	275	87-012-145-080		CAP, CHIP S 270P CH	....EFG.....
D	204	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	206	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	209	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	203	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	205	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	202	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	201	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	210	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	211	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
J	231	87-A60-420-010		JACK,3.5 ST (MSC)	ABCDEFG.....
J	241	87-A60-217-010		TERMINAL,SPKR 4P	.BCDEFG.....
J	241	87-A60-238-010	1A	TERMINAL,SP 4P (MSC)	A.....
J	603	87-099-801-010		JACK,PIN 1P BLK	ABCDEFG.....
L	202	87-005-366-010		COIL, 1UH	ABCDEFG.....
L	201	87-005-366-010		COIL, 1UH	ABCDEFG.....
Q	204	87-A30-197-080		TR,KTA1267GR	ABCDEFG.....
Q	201	87-A30-197-080		TR,KTA1267GR	ABCDEFG.....
Q	203	87-A30-197-080		TR,KTA1267GR	ABCDEFG.....
Q	202	87-A30-197-080		TR,KTA1267GR	ABCDEFG.....
Q	208	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	205	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	206	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	207	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	209	89-333-317-080		TR,2SC3331 (0.5W)	ABCDEFG.....
Q	217	87-026-219-080		TR,DTA144ES (0.3W)	ABCDEFG.....
Q	214	87-A30-126-010		TR,2SB1616	ABCDEFG.....
Q	213	87-A30-126-010		TR,2SB1616	ABCDEFG.....
Q	211	87-A30-127-010		TR,2SD2478	ABCDEFG.....
Q	212	87-A30-127-010		TR,2SD2478	ABCDEFG.....
Q	215	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	216	87-A30-198-080		TR,KTC3199GR	ABCDEFG.....
Q	210	89-333-317-080		TR,2SC3331 (0.5W)	ABCDEFG.....
Q	263	87-026-609-080		TR,KTA1266GR	ABCDEFG.....
Q	262	89-406-555-080		TR,2SD655 (0.5W)	ABCDEFG.....
Q	261	89-406-555-080		TR,2SD655 (0.5W)	ABCDEFG.....
R	223	87-A00-258-080		RES,M/F 0.22-1W J	ABCDEFG.....
R	224	87-A00-258-080		RES,M/F 0.22-1W J	ABCDEFG.....
R	249	87-A00-258-080		RES,M/F 0.22-1W J	ABCDEFG.....
R	250	87-A00-258-080		RES,M/F 0.22-1W J	ABCDEFG.....
*		8A-CL9-671-010		F-CABLE,9P 2.5	ABCDEFG.....
C	102	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	109	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	108	87-010-381-080		CAP, ELECT 330-16V	ABCDEFG.....
C	107	87-010-384-080		CAP, ELECT 100-25V	ABCDEFG.....
C	106	87-010-408-080		CAP, ELECT 47-50V	ABCDEFG.....
C	105	87-012-140-080		CAP 470P	ABCDEFG.....
C	101	87-016-495-000		CAP,E 3300-25 M SMG	ABCDEFG.....
C	104	87-A10-011-090		CAP,E 2200-25 SMG	ABCDEFG.....
C	111	87-010-247-080		CAP, ELECT 100-50V	ABCDEFG.....
C	110	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	112	87-010-263-080		CAP, ELECT 100-10V	ABCDEFG.....
C	114	87-010-374-080		CAP, ELECT 47-10V	ABCDEFG.....
C	113	87-010-403-080		CAP, ELECT 3.3-50V	ABCDEFG.....
C	115	87-A11-007-080		CAP,M 0.047-50 J DE	ABCDEFG.....
C	116	87-A11-007-080		CAP,M 0.047-50 J DE	ABCDEFG.....
C	123	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	122	87-010-260-080		CAP, ELECT 47-25V	ABCDEFG.....
C	132	87-012-368-080		C-CAP,S 0.1-50 F	ABCDEFG.....
C	131	87-012-368-080		C-CAP,S 0.1-50 F	ABCDEFG.....
C	151	87-010-196-080		CHIP CAPACITOR,0.1-25	ABCDEFG.....
D	108	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	101	87-A40-454-080		DIODE,1N5393 GW	ABCDEFG.....
D	102	87-A40-454-080		DIODE,1N5393 GW	ABCDEFG.....
D	104	87-A40-454-080		DIODE,1N5393 GW	ABCDEFG.....
D	103	87-A40-454-080		DIODE,1N5393 GW	ABCDEFG.....
D	106	87-A40-553-080		DIODE,1N4003 LES	ABCDEFG.....
D	105	87-A40-553-080		DIODE,1N4003 LES	ABCDEFG.....
D	107	87-A40-781-080		ZENER,UZ36BSA	ABCDEFG.....
D	117	87-A40-553-080		DIODE,1N4003 LES	ABCDEFG.....
D	116	87-A40-553-080		DIODE,1N4003 LES	ABCDEFG.....
D	110	87-A40-764-080		ZENER,UZ10BSC	ABCDEFG.....

ELECTRICAL MAIN PARTS LIST - 3/6

D	171	87-020-465-080	DIODE,1SS133 (110MA)	ABCDEFG.....
PN	101	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCDEFG.....
PR	201	87-A90-070-080	PROTECTOR,3.5A 251	.B.....
PR	202	87-A90-070-080	PROTECTOR,3.5A 251	.B.....
PR	202	87-A90-473-080	PROTECTOR,3.5A 491SERIES 60V	A.CDEFG.....
PR	201	87-A90-473-080	PROTECTOR,3.5A 491SERIES 60V	A.CDEFG.....
Q	104	87-A30-196-080	TR,2SC4115SRS	ABCDEFG.....
Q	107	87-A30-198-080	TR,KTC3199GR	ABCDEFG.....
Q	109	87-A30-198-080	TR,KTC3199GR	ABCDEFG.....
Q	106	87-A30-198-080	TR,KTC3199GR	ABCDEFG.....
Q	105	89-113-187-880	TRNSISTOR,2SA1318 (0.5W)	ABCDEFG.....
Q	101	89-213-702-010	TR,2SB1370 (1.8W)	ABCDEFG.....
Q	102	89-333-317-080	TR,2SC3331 (0.5W)	ABCDEFG.....
Q	115	87-026-219-080	TR,DTA144ES (0.3W)	ABCDEFG.....
Q	110	87-A30-197-080	TR,KTA1267GR	ABCDEFG.....
Q	112	87-A30-198-080	TR,KTC3199GR	ABCDEFG.....
Q	111	89-213-702-010	TR,2SB1370 (1.8W)	ABCDEFG.....
C	303	87-010-177-080	C-CAP,S 820P-50 SL	ABCDEFG.....
C	304	87-010-177-080	C-CAP,S 820P-50 SL	ABCDEFG.....
C	307	87-010-263-080	CAP, ELECT 100-10V	ABCDEFG.....
C	308	87-010-263-080	CAP, ELECT 100-10V	ABCDEFG.....
C	314	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDEFG.....
C	313	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDEFG.....
C	312	87-010-195-080	C-CAP,S 0.068-25 F	ABCDEFG.....
C	311	87-010-195-080	C-CAP,S 0.068-25 F	ABCDEFG.....
C	315	87-010-374-080	CAP, ELECT 47-10V	ABCDEFG.....
C	317	87-010-546-080	CAP, ELECT 0.33-50V	ABCDEFG.....
C	318	87-010-546-080	CAP, ELECT 0.33-50V	ABCDEFG.....
C	320	87-010-401-080	CAP, ELECT 1-50V	ABCDEFG.....
C	321	87-010-405-080	CAP, ELECT 10-50V	ABCDEFG.....
C	349	87-010-322-080	C-CAP,S 100P-50 CH	....EFG.....
C	340	87-012-156-080	C-CAP,S 220P-50 CH	ABCDEFG.....
C	350	87-010-322-080	C-CAP,S 100P-50 CH	....EFG.....
C	361	87-010-374-080	CAP, ELECT 47-10V	ABCDEFG.....
C	362	87-010-401-080	CAP, ELECT 1-50V	ABCDEFG.....
C	405	87-010-188-080	CAP,CHIP 6800P	ABCDEFG.....
C	406	87-010-188-080	CAP,CHIP 6800P	ABCDEFG.....
C	404	87-010-321-080	CHIP CAPACITOR,82P(J)	ABCDEFG.....
C	403	87-010-321-080	CHIP CAPACITOR,82P(J)	ABCDEFG.....
C	401	87-010-401-080	CAP, ELECT 1-50V	ABCDEFG.....
C	402	87-010-401-080	CAP, ELECT 1-50V	ABCDEFG.....
C	407	87-010-426-080	C-CAP,S 0.012-25 B	ABCDEFG.....
C	408	87-010-426-080	C-CAP,S 0.012-25 B	ABCDEFG.....
C	459	87-010-175-080	CAP 560P	ABCDEFG.....
C	458	87-010-178-080	CHIP CAP 1000P	ABCDEFG.....
C	453	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEFG.....
C	455	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEFG.....
C	454	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEFG.....
C	456	87-010-197-080	CAP, CHIP 0.01 DM	ABCDEFG.....
C	451	87-010-198-080	CAP, CHIP 0.022	ABCDEFG.....
C	452	87-010-382-080	CAP, ELECT 22-25V	ABCDEFG.....
C	457	87-A10-772-080	CAP,M 5600P-50 J	ABCDEFG.....
C	461	87-012-158-080	C-CAP,S 390P-50 CH	ABCDEFG.....
C	462	87-012-158-080	C-CAP,S 390P-50 CH	ABCDEFG.....
CN	351	87-A60-624-010	CONN,7P V 2MM JMT	ABCDEFG.....
D	311	87-020-465-080	DIODE,1SS133 (110MA)	ABCDEFG.....
D	310	87-020-465-080	DIODE,1SS133 (110MA)	ABCDEFG.....
IC	301	87-017-889-010	IC,NJM4558LD	ABCDEFG.....
IC	401	87-017-889-010	IC,NJM4558LD	ABCDEFG.....
L	451	87-007-342-010	COIL,OSC 85K BIAS	ABCDEFG.....
Q	306	87-026-219-080	TR,DTA144ES (0.3W)	ABCDEFG.....
Q	307	87-A30-090-080	FET,2SK2541	ABCDEFG.....
Q	305	87-A30-090-080	FET,2SK2541	ABCDEFG.....
Q	308	87-A30-090-080	FET,2SK2541	ABCDEFG.....
Q	309	87-A30-197-080	TR,KTA1267GR	ABCDEFG.....
Q	310	87-A30-197-080	TR,KTA1267GR	ABCDEFG.....
Q	315	89-327-125-080	CHIP TR,2SC2712GR	..CDEFG.....
Q	442	87-A30-197-080	TR,KTA1267GR	ABCDEFG.....
Q	441	87-A30-197-080	TR,KTA1267GR	ABCDEFG.....
Q	452	87-A30-198-080	TR,KTC3199GR	....EFG.....
Q	453	89-333-317-080	TR,2SC3331 (0.5W)	ABCDEFG.....
Q	451	89-333-317-080	TR,2SC3331 (0.5W)	ABCDEFG.....
Q	454	89-333-317-080	TR,2SC3331 (0.5W)	ABCDEFG.....
C	152	87-010-178-080	CHIP CAP 1000P	....EFG.....
C	601	87-010-180-080	C-CER 1500P	ABCDEFG.....
C	602	87-010-180-080	C-CER 1500P	ABCDEFG.....
C	603	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFG.....
C	609	87-012-287-080	C-CAP,U 0.015-25 F	ABCDEFG.....
C	615	87-010-154-080	CAP CHIP 10P	ABCDEFG.....
C	610	87-010-213-080	C-CAP,S 0.015-50 B	ABCDEFG.....
C	619	87-010-401-080	CAP, ELECT 1-50V	ABCDEFG.....
C	617	87-010-408-080	CAP, ELECT 47-50V	ABCDEFG.....
C	616	87-010-408-080	CAP, ELECT 47-50V	ABCDEFG.....
C	612	87-010-545-080	CAP, ELECT 0.22-50V	ABCDEFG.....
C	611	87-010-545-080	CAP, ELECT 0.22-50V	ABCDEFG.....
C	613	87-010-545-080	CAP, ELECT 0.22-50V	ABCDEFG.....
C	614	87-010-545-080	CAP, ELECT 0.22-50V	ABCDEFG.....

ELECTRICAL MAIN PARTS LIST - 4/6

C	627	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	628	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	620	87-010-401-080		CAP, ELECT 1-50V	ABCDEFG.....
C	635	87-010-309-080	0E	C-CAP,1000P-50 CH	.....
C	635	87-015-785-080		CHIP CAPACITOR, 0.1FZ-25Z	..CDEFG.....
C	661	87-010-178-080		CHIP CAP 1000P	....EFG.....
C	664	87-015-629-080	0E	CHIP CAPACITOR, 0.0022	.....
C	670	87-010-196-080		CHIP CAPACITOR,0.1-25	ABCDEFG.....
C	698	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	697	87-010-197-080		CAP, CHIP 0.01 DM	ABCDEFG.....
C	704	87-010-971-080		C-CAP,S 4700P-50 B J	....EFG.....
C	703	87-010-971-080		C-CAP,S 4700P-50 B J	....EFG.....
CN	202	87-099-719-010		CONN,30P TYK-B(X)	ABCDEFG.....
CN	702	87-099-570-010		CONN,13P TUC-P13P-B1	ABCDE.....
CN	702	87-A60-189-010		CONN,16P V TUC-P16P-B1	.....FG.....
D	603	87-020-465-080		DIODE,1SS133 (110MA)	.....FG.....
D	602	87-A40-739-080		ZENER,UZ2.7BSA	ABCDEFG.....
D	601	87-A40-739-080		ZENER,UZ2.7BSA	ABCDEFG.....
IC	601	87-A21-520-040		C-IC,M61509FP	ABCDEFG.....
J	601	87-A60-881-010		JACK,PIN 2P MSP 242V05 PBSN	ABCDEFG.....
Q	602	87-026-295-080		TR,DTC144TK	ABCDEFG.....
Q	603	87-026-295-080		TR,DTC144TK	ABCDEFG.....
Q	601	87-026-502-080		DTC144TS	ABCDEFG.....
C	604	87-012-156-080		C-CAP,S 220P-50 CH	..CDEFG.....
C	705	87-010-186-080		CAP,CHIP 4700P	..CDEFG.....
D	702	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
FB	102	87-A90-896-080		F-BEAD, 035600STY7	..CDEFG.....
FB	101	87-A90-896-080		F-BEAD, 035600STY7	..CDEFG.....
L	96	87-003-097-080		COIL,1UH	.B.....
C	8	87-010-198-080	0E	CAP, CHIP 0.022	A.....
C	4	87-010-248-080	0E	CAP, ELECT 220-10V	A.....
C	3	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	9	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	6	87-010-374-080	0E	CAP, ELECT 47-10V	A.....
C	1	87-010-403-080	0E	CAP, ELECT 3.3-50V	A.....
C	7	87-012-349-080	0E	C-CAP,S 1000P-50 CH	A.....
C	18	87-010-213-080	0E	C-CAP,S 0.015-50 B	A.....
C	10	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	12	87-010-401-080	0E	CAP, ELECT 1-50V	A.....
C	14	87-010-405-080	0E	CAP, ELECT 10-50V	A.....
C	16	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....
C	17	87-012-349-080	0E	C-CAP,S 1000P-50 CH	A.....
C	29	87-010-186-080	0E	CAP,CHIP 4700P	A.....
C	20	87-010-193-080	0E	CHIP CAPACITOR,0.033	A.....
C	23	87-010-992-080	0E	C-CAP,S 0.047-25 B	A.....
C	21	87-A10-306-080	0E	CAP,M 0.082-50 J	A.....
C	34	87-010-182-080	0E	C-CAP,S 2200P-50 B	A.....
C	38	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	32	87-010-374-080	0E	CAP, ELECT 47-10V	A.....
C	36	87-010-374-080	0E	CAP, ELECT 47-10V	A.....
C	33	87-010-401-080	0E	CAP, ELECT 1-50V	A.....
C	31	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....
C	30	87-012-156-080	0E	C-CAP,S 220P-50 CH	A.....
C	39	87-012-349-080	0E	C-CAP,S 1000P-50 CH	A.....
C	40	87-010-150-080	0E	C-CAP,S 6P-50 CH	A.....
C	46	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	45	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	47	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	42	87-010-313-080	0E	CAP, CHIP 18P	A.....
C	48	87-010-315-080	0E	C-CAP,S 27P-50 CH	A.....
C	41	87-A10-301-080	0E	CAP,M 0.033-50 J	A.....
C	59	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	58	87-010-316-080	0E	C-CAP,S 33P-50 CH	A.....
C	57	87-010-316-080	0E	C-CAP,S 33P-50 CH	A.....
C	51	87-010-994-080	0E	C-CAP,S 680P-50 CH	A.....
C	50	87-012-140-080	0E	CAP 470P	A.....
C	66	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	60	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	61	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
C	67	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	62	87-010-370-080	0E	CAP,E 330-6.3 SME	A.....
C	79	87-010-197-080	0E	CAP, CHIP 0.01 DM	A.....
C	77	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	76	87-A10-102-080	0E	CAP,E 1000-10 REA	A.....
C	80	87-010-112-080	0E	CAP, ELECT 100-16V	A.....
C	83	87-010-181-080	0E	CAP,CHIP S 1800P	A.....
C	84	87-010-181-080	0E	CAP,CHIP S 1800P	A.....
C	81	87-010-405-080	0E	CAP, ELECT 10-50V	A.....
C	82	87-010-405-080	0E	CAP, ELECT 10-50V	A.....
C	95	87-010-197-080	0E	CAP, CHIP 0.01 DM	A.....
C	97	87-010-197-080	0E	CAP, CHIP 0.01 DM	A.....
C	90	87-010-197-080	0E	CAP, CHIP 0.01 DM	A.....
C	96	87-010-221-080	0E	CAP, ELECT 470-10V	A.....
C	92	87-010-387-080	1A	CAP,E 470-25 SME	A.....
C	91	87-010-404-080	0E	CAP, ELECT 4.7-50V	A.....
C	98	87-012-154-080	0E	C-CAP,S 150P-50 CH	A.....
C	105	87-010-322-080	0E	C-CAP,S 100P-50 CH	A.....

ELECTRICAL MAIN PARTS LIST - 5/6

C	103	87-010-322-080	0E	C-CAP,S 100P-50 CH	A.....
C	101	87-010-322-080	0E	C-CAP,S 100P-50 CH	A.....
C	104	87-010-322-080	0E	C-CAP,S 100P-50 CH	A.....
C	102	87-010-322-080	0E	C-CAP,S 100P-50 CH	A.....
C	110	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A.....
CN	4	87-099-032-010	0E	CONN,15P 6216 H	A.....
CN	6	87-A60-130-010	0E	CONN,5P V FE	A.....
CN	3	87-A60-131-010	0E	CONN,6P V FE	A.....
CN	1	87-A60-424-010	0E	CONN,16P V TOC-B	A.....
D	1	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	2	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	12	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	13	87-A40-270-080	0E	C-DIODE,MC2838	A.....
IC	6	87-001-536-010	1A	IC,NJM78M05FA	A.....
IC	4	87-A20-157-010	1E	IC,TA2092N	A.....
IC	1	87-A20-446-010	1E	C-IC,LA9241ML	A.....
IC	2	87-A20-459-010	2A	C-IC,LC78622ED	A.....
IC	10	87-001-982-010	1B	IC,TA7291S	A.....
L	1	87-003-102-080	0E	COIL, 10UH	A.....
Q	1	87-026-463-080	0E	TR,2SA933S (0.3W)	A.....
Q	11	87-026-297-080	0E	TR,DTA144TK	A.....
Q	13	87-026-297-080	0E	TR,DTA144TK	A.....
Q	14	87-026-297-080	0E	TR,DTA144TK	A.....
Q	12	87-026-297-080	0E	TR,DTA144TK	A.....
Q	10	87-026-297-080	0E	TR,DTA144TK	A.....
Q	15	87-026-297-080	0E	TR,DTA144TK	A.....
Q	84	87-026-239-080	0E	TR,DTC114TK (0.2W)	A.....
Q	83	87-026-239-080	0E	TR,DTC114TK (0.2W)	A.....
Q	82	87-026-297-080	0E	TR,DTA144TK	A.....
Q	81	87-026-297-080	0E	TR,DTA144TK	A.....
Q	90	89-109-521-080	0E	TR,2SA952 (0.6W)	A.....
Q	94	89-109-521-080	0E	TR,2SA952 (0.6W)	A.....
Q	96	89-109-521-080	0E	TR,2SA952 (0.6W)	A.....
Q	92	89-109-521-080	0E	TR,2SA952 (0.6W)	A.....
Q	98	89-318-155-080	0E	TR,2SC1815 (0.4W)	A.....
R	70	87-029-124-090	0E	RESISTOR, FUSE 1/4W 2.2	A.....
R	73	87-029-361-090	0E	FUSING RESISTOR, 1/2W-3.3	A.....
X	1	87-A70-046-010	1B	VIB,XTAL 16.934MHZ	A.....
C	8	87-010-198-080		CAP, CHIP 0.022	.BCDEFG.....
C	4	87-010-248-080		CAP, ELECT 220-10V	.BCDEFG.....
C	9	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	3	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	6	87-010-374-080		CAP, ELECT 47-10V	.BCDEFG.....
C	1	87-010-403-080		CAP, ELECT 3.3-50V	.BCDEFG.....
C	7	87-012-349-080		C-CAP,S 1000P-50 CH	.BCDEFG.....
C	18	87-010-213-080		C-CAP,S 0.015-50 B	.BCDEFG.....
C	10	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	12	87-010-401-080		CAP, ELECT 1-50V	.BCDEFG.....
C	14	87-010-405-080		CAP, ELECT 10-50V	.BCDEFG.....
C	16	87-010-545-080		CAP, ELECT 0.22-50V	.BCDEFG.....
C	17	87-012-349-080		C-CAP,S 1000P-50 CH	.BCDEFG.....
C	29	87-010-186-080		CAP,CHIP 4700P	.BCDEFG.....
C	20	87-010-193-080		CHIP CAPACITOR,0.033	.BCDEFG.....
C	23	87-010-992-080		C-CAP,S 0.047-25 B	.BCDEFG.....
C	21	87-A10-306-080		CAP,M 0.082-50 J	.BCDEFG.....
C	34	87-010-182-080		C-CAP,S 2200P-50 B	.BCDEFG.....
C	38	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	32	87-010-374-080		CAP, ELECT 47-10V	.BCDEFG.....
C	36	87-010-374-080		CAP, ELECT 47-10V	.BCDEFG.....
C	33	87-010-401-080		CAP, ELECT 1-50V	.BCDEFG.....
C	37	87-010-405-080		CAP, ELECT 10-50V	.BCDEFG.....
C	31	87-010-545-080		CAP, ELECT 0.22-50V	.BCDEFG.....
C	30	87-012-156-080		C-CAP,S 220P-50 CH	.BCDEFG.....
C	39	87-012-349-080		C-CAP,S 1000P-50 CH	.BCDEFG.....
C	40	87-010-148-080		CAP, CHIP S 75P SL	..CDEFG.....
C	40	87-010-150-080	0E	C-CAP,S 6P-50 CH	.B.....
C	47	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	46	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	45	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	42	87-010-313-080		CAP, CHIP 18P	.BCDEFG.....
C	48	87-010-315-080		C-CAP,S 27P-50 CH	.BCDEFG.....
C	41	87-A10-294-080		CAP,M 8200P-50 J	..CDEFG.....
C	41	87-A10-301-080	0E	CAP,M 0.033-50 J	.B.....
C	59	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	57	87-010-316-080		C-CAP,S 33P-50 CH	.BCDEFG.....
C	58	87-010-316-080		C-CAP,S 33P-50 CH	.BCDEFG.....
C	51	87-010-994-080		C-CAP,S 680P-50 CH	.BCDEFG.....
C	50	87-012-140-080		CAP 470P	.BCDEFG.....
C	66	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	61	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	60	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	67	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	62	87-010-370-080		CAP,E 330-6.3 SME	.BCDEFG.....
C	79	87-010-197-080		CAP, CHIP 0.01 DM	.BCDEFG.....
C	77	87-010-263-080		CAP, ELECT 100-10V	.BCDEFG.....
C	76	87-A10-102-080		CAP,E 1000-10 REA	.BCDEFG.....
C	80	87-010-112-080		CAP, ELECT 100-16V	.BCDEFG.....

ELECTRICAL MAIN PARTS LIST - 6/6

C	84	87-010-181-080		CAP,CHIP S 1800P	.BCDEFG.....
C	83	87-010-181-080		CAP,CHIP S 1800P	.BCDEFG.....
C	81	87-010-405-080		CAP, ELECT 10-50V	.BCDEFG.....
C	82	87-010-405-080		CAP, ELECT 10-50V	.BCDEFG.....
C	97	87-010-197-080		CAP, CHIP 0.01 DM	.BCDEFG.....
C	95	87-010-197-080		CAP, CHIP 0.01 DM	.BCDEFG.....
C	90	87-010-197-080		CAP, CHIP 0.01 DM	.BCDEFG.....
C	96	87-010-221-080		CAP, ELECT 470-10V	.BCDEFG.....
C	92	87-010-387-080		CAP,E 470-25 SME	.BCDEFG.....
C	91	87-010-404-080		CAP, ELECT 4.7-50V	.BCDEFG.....
C	98	87-012-154-080		C-CAP,S 150P-50 CH	.BCDEFG.....
C	105	87-010-322-080		C-CAP,S 100P-50 CH	.BCDEFG.....
C	104	87-010-322-080		C-CAP,S 100P-50 CH	.BCDEFG.....
C	101	87-A11-448-080		C-CAP,S 100P-50 J CG	.....
C	103	87-A11-448-080		C-CAP,S 100P-50 J CG	.....
C	110	87-010-196-080		CHIP CAPACITOR,0.1-25	.BCDEFG.....
C	162	87-010-178-080		CHIP CAP 1000P	..CDEFG.....
CN	4	87-099-032-010		CONN,15P 6216 H	.BCDEFG.....
CN	3	87-A60-131-010		CONN,6P V FE	.BCDEFG.....
CN	6	87-A60-153-010		CONN,5P H FE	.BCDEFG.....
CN	1	87-A60-424-010		CONN,16P V TOC-B	.BCDEFG.....
D	2	87-020-465-080		DIODE,1SS133 (110MA)	.BCDEFG.....
D	1	87-020-465-080		DIODE,1SS133 (110MA)	.BCDEFG.....
D	12	87-020-465-080		DIODE,1SS133 (110MA)	.BCDEFG.....
D	13	87-A40-270-080		C-DIODE,MC2838	.BCDEFG.....
IC	6	87-001-536-010		IC,NJM78M05FA	.BCDEFG.....
IC	4	87-A20-157-010		IC,TA2092N	.BCDEFG.....
IC	1	87-A20-446-010		C-IC,LA9241ML	.BCDEFG.....
IC	2	87-A20-459-010		C-IC,LC78622ED	.BCDEFG.....
IC	10	87-001-982-010		IC,TA7291S	.BCDEFG.....
JR	161	83-XM1-617-080		C-COIL,BK2125HM601	..CDEFG.....
L	1	87-003-102-080		COIL, 10UH	.BCDEFG.....
PN	101	86-NFZ-222-010		PIN,DIA1-6.5	..CDEFG.....
Q	1	87-026-463-080		TR,2SA933S (0.3W)	.BCDEFG.....
Q	14	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	12	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	15	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	13	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	10	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	11	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	83	87-026-239-080		TR,DTC114TK (0.2W)	.BCDEFG.....
Q	84	87-026-239-080		TR,DTC114TK (0.2W)	.BCDEFG.....
Q	81	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	82	87-026-297-080		TR,DTA144TK	.BCDEFG.....
Q	92	89-109-521-080		TR,2SA952 (0.6W)	.BCDEFG.....
Q	96	89-109-521-080		TR,2SA952 (0.6W)	.BCDEFG.....
Q	90	89-109-521-080		TR,2SA952 (0.6W)	.BCDEFG.....
Q	94	89-109-521-080		TR,2SA952 (0.6W)	.BCDEFG.....
Q	98	89-318-155-080		TR,2SC1815 (0.4W)	.BCDEFG.....
R	70	87-029-124-090		RESISTOR, FUSE 1/4W 2.2	.BCDEFG.....
R	73	87-029-361-090		FUSING RESISTOR, 1/2W-3.3	.BCDEFG.....
X	1	87-A70-046-010		VIB,XTAL 16.934MHZ	.BCDEFG.....
C	101	87-010-387-080		CAP,E 470-25 SME	ABCDEFG.....
CN	101	87-A61-110-010		CONN,9P V TID-A	ABCDEFG.....
D	102	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	101	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	103	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	107	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	105	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	108	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
D	104	87-020-465-080		DIODE,1SS133 (110MA)	ABCDEFG.....
FC	101	87-033-213-080		CLAMP, FUSE	A.CD.....
FC	102	87-033-213-080		CLAMP, FUSE	A.CD.....
PR	102	87-026-681-080		PROTECTOR,5A 60V 491	A.CDEFG.....
PR	101	87-026-681-080		PROTECTOR,5A 60V 491	A.CDEFG.....
PR	101	87-026-690-080		FUSE,5A 125V 251	.B.....
PR	102	87-026-690-080		FUSE,5A 125V 251	.B.....
PR	104	87-A91-276-080	1B	FUSE,125MA 125V F 251	.B.....
PT	102	8A-NF8-661-010		PT,SUB ANF-8 (U)	.B.....
PT	102	8A-NF8-662-010		PT,SUB ANF-8 (E)	....EFG.....
PT	102	8A-NF8-673-010		PT,SUB ANF-8 (H)KAMI	A.CD.....
Q	101	87-026-610-080		TR,KTC3198GR	ABCDEFG.....
RY	102	87-A90-976-010		RELAY,AC12V SDT-S-112LMR	.B..EFG.....
RY	102	87-A91-281-010		RELAY,AC DC12V OSA-SS-212DM5	A.CD.....
SW	101	87-A90-234-010		SW,SL 1-2-2 SW2201	A.CD.....
T	102	87-A60-317-010		TERMINAL, 1P MSC	ABCDEFG.....
T	101	87-A60-317-010		TERMINAL, 1P MSC	ABCDEFG.....

ELECTRICAL PARTS LIST-1/3 <ZZA-1>(EZ,K)

NOTE: The characters in the suffix column indicate the part usage.

ZRDS .....XX.....F.....
EZKG .....XX.....G.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 701	87-010-381-080	0E	CAP, ELECT 330-16V	ABCDEFGH.....
C 702	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGH.....
C 711	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.FGH.....
C 711	87-010-553-080	0E	CAP,E 47-16	....E.....
C 712	87-010-831-080	0E	C-CAP,U,0.1-16F	ABCDEFGH.....
C 718	87-012-179-080	0E	C-CAP,U 20P-50 CH	.BCD.....
C 727	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABCDEFGH.....
C 728	87-010-248-080	0E	CAP, ELECT 220-10V	ABCDEFGH.....
C 722	87-012-176-080	0E	CAP 15P	ABCDEFGH.....
C 721	87-012-176-080	0E	CAP 15P	ABCDEFGH.....
C 720	87-012-195-080	0E	C-CAP,U 100P-50CH	ABCDEFGH.....
C 729	87-012-274-080	0E	CHIP CAP,U 1000P-50B	ABCDEFGH.....
C 725	87-018-131-080	0E	CAP, CER 1000P-50V	.....FG.....
C 806	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C 805	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
CN 701	87-A60-650-010	1A	CONN,16P H GRY TUC-P16X-C1	.....F.....
CN 701	87-A60-700-010	0E	CONN,13P H GRY TUC-P13X-C1	ABCDE.GH.....
D 721	87-017-149-080	0E	ZENER,HZS6A2L	.BCDEFGH.....
D 722	87-020-465-080	0E	DIODE,1SS133 (110MA)	.....FG.....
D 721	87-A40-234-080	0E	ZENER,MTZJ5.6A	A.....
IC 721	87-070-127-110	1C	IC,LC72131 D	ABCDEFGH.....
Q 712	87-A30-072-080	0E	C-TR,RT1P 144C	....E.....
Q 713	87-A30-072-080	0E	C-TR,RT1P 144C	....E.....
Q 711	87-A30-196-080	0E	TR,2SC4115SRS	A.....
Q 711	87-A30-234-080	0E	TR,CSC4115BC	.BCDEFGH.....
X 721	87-A70-061-010	1A	VIB,XTAL 4.500MHZ CSA-309	ABCDEFGH.....
C 872	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB.....H.....
C 873	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....H.....
C 878	87-012-278-080	0E	C-CAP,U 2200P-50 B	AB.....H.....
C 877	87-012-278-080	0E	C-CAP,U 2200P-50 B	AB.....H.....
C 889	87-010-248-080	0E	CAP, ELECT 220-10V	AB.....H.....
C 884	87-010-260-080	0E	CAP, ELECT 47-25V	AB.....H.....
C 883	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....H.....
C 885	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....H.....
C 886	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....H.....
C 888	87-010-787-080	0E	CAP, U 0.022-25	AB.....H.....
C 881	87-012-141-080	0E	CHIP-CAPACITOR,0.22-16F	AB.....H.....
C 882	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	AB.....H.....
C 887	87-012-286-080	0E	CAP, U 0.01-25	AB.....H.....
C 886	87-016-460-080	0E	C-CAP,S 0.22-16 B	.B.....
C 885	87-016-460-080	0E	C-CAP,S 0.22-16 B	.B.....
IC 871	87-070-060-040	1F	IC,TA2040AF	AB.....H.....
Q 873	87-026-226-080	0E	CHIP-TR,DTA143EK	AB.....H.....
X 891	87-030-394-010	1B	VIB,CER CSA3.6MGF228	AB.....H.....
C 705	87-010-213-080	0E	C-CAP,S 0.015-50 B	.....
C 706	87-010-213-080	0E	C-CAP,S 0.015-50 B	.....
C 705	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BCDE.....
C 706	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BCDE.....
C 734	87-010-180-080	0E	C-CER 1500P	.....
C 738	87-010-180-080	0E	C-CER 1500P	.....
C 737	87-010-180-080	0E	C-CER 1500P	.....
C 733	87-010-180-080	0E	C-CER 1500P	.....
C 735	87-010-213-080	0E	C-CAP,S 0.015-50 B	.....
C 736	87-010-213-080	0E	C-CAP,S 0.015-50 B	.....
C 733	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BCDE.....
C 735	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BCDE.....
C 734	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BCDE.....
C 736	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BCDE.....
C 734	87-012-280-080	0E	CAP, U 3300P-50	.....FG.....
C 733	87-012-280-080	0E	CAP, U 3300P-50	.....FG.....
C 738	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BCDE.....
C 737	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BCDE.....
C 752	87-010-220-080	0E	C-CAP,S 0.018-25 B	.B..E.....
C 751	87-010-220-080	0E	C-CAP,S 0.018-25 B	.B..E.....
C 758	87-012-167-080	0E	C-CAP,U 5P-50 CH	ABCDEFGH.....
C 757	87-012-188-080	0E	C-CAP,U 47P-50 CH	ABCDEFGH.....
C 753	87-012-195-080	0E	C-CAP,U 100P-50CH	.....FG.....
C 752	87-012-282-080	0E	CAP, U 4700P-50	.....FG.....
C 756	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C 751	87-012-365-080	0E	C-CAP,S 0.027-25VBK	..CD.....
C 752	87-012-365-080	0E	C-CAP,S 0.027-25VBK	..CD.....
C 766	87-010-197-080	0E	CAP, CHIP 0.01 DM	.....FG.....
C 769	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGH.....
C 765	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C 768	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C 764	87-012-337-080	0E	C-CAP,U 56P-50 CH	ABCDE..H.....
C 774	87-010-263-080	0E	CAP, ELECT 100-10V	ABCDEFGH.....
C 771	87-010-383-080	0E	CAP, ELECT 33-25V	ABCDEFGH.....
C 777	87-010-400-080	0E	CAP, ELECT 0.47-50V	ABCDE..H.....
C 775	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGH.....

ELECTRICAL PARTS LIST-2/3 <ZZA-1>(EZ,K)

C	777	87-010-493-040	0E	CAP,E 0.47-50 GAS	.....
C	777	87-010-493-080	0E	CAP,E 0.47-50 GAS	.....FG.....
C	770	87-010-829-080	0E	CAP, U 0.047-16	ABCDEFGH.....
C	780	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABCDEFGH.....
C	786	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGH.....
C	785	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGH.....
C	785	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGH.....
C	786	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGH.....
C	786	87-010-494-080	0E	CAP ELECT GAS 1/50	....E.....
C	785	87-010-494-080	0E	CAP ELECT GAS 1/50	....E.....
C	788	87-012-275-080	0E	C-CAP,U 1200P-50 B	ABCDEFGH.....
C	787	87-012-275-080	0E	C-CAP,U 1200P-50 B	ABCDEFGH.....
C	784	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	796	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGH.....
C	794	87-010-406-080	0E	CAP, ELECT 22-50	ABCDEFGH.....
C	795	87-010-596-080	0E	CAP, S 0.047-16	..CDEFG.....
C	793	87-012-273-080	0E	C-CAP,U 820P-50 B	ABCDEFGH.....
C	798	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A....FGH.....
C	797	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A....FGH.....
D	771	87-020-465-080	0E	DIODE,1SS133 (110MA)	ABCDEFGH.....
D	773	87-A40-291-080	0E	DIODE,1N4148 (CPT)	.....
IC	771	87-A20-913-010	1D	IC,LA1837NL	ABCDEFGH.....
L	771	87-A50-266-010	1A	COIL,FM DET-2N(TOK)	ABCDEFGH.....
L	772	87-A90-052-010	1C	FLTR,CFMT-450A(TOK)	....E.....
L	772	87-A90-053-010	1C	FLTR,PCFMT-060(TOK)	AB.....H.....
L	772	87-A90-733-010	1A	FLTR,PCFAZH-450 (TOK)	.....
L	772	87-A91-110-010	1B	FLTR,PCFJZH-450 (TOK)	..CD.FG.....
L	781	87-005-847-080	0E	COIL,2.2UH(CECS)	.....FG.....
L	792	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	.....FG.....
L	791	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	.....FG.....
X	771	87-030-354-010	1A	VIB,CF BFU 450C	....E.....
C	859	87-012-286-080	0E	CAP, U 0.01-25	.....F.....
C	865	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	.....F.....
C	866	87-010-405-080	0E	CAP, ELECT 10-50V	.....F.....
C	864	87-010-405-080	0E	CAP, ELECT 10-50V	.....F.....
C	869	87-012-180-080	0E	C-CAP,U 22P-50 CH	.....F.....
C	868	87-012-184-080	0E	C-CAP,U 33P-50 CH	.....F.....
C	862	87-012-199-080	0E	CAP 220P	.....F.....
C	861	87-012-199-080	0E	CAP 220P	.....F.....
C	863	87-012-270-080	0E	CAP, U 470P-50	.....F.....
C	867	87-012-286-080	0E	CAP, U 0.01-25	.....F.....
IC	851	87-A20-440-040	1H	C-IC,BU1920FS	.....F.....
L	851	87-005-847-080	0E	COIL,2.2UH(CECS)	.....F.....
Q	853	87-A30-076-080	0E	C-TR,2SC3052F	.....F.....
X	851	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	.....F.....
C	808	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	809	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	801	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	803	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	807	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	804	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	802	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	810	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	820	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGH.....
C	893	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	894	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	942	87-012-168-080	0E	C-CAP,U 6P-50 CH	.....FG.....
C	942	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	.....
C	941	87-012-180-080	0E	C-CAP,U 22P-50 CH	....E.....
C	944	87-014-049-080	0E	CAP,PP 470P-100 J	.....
C	944	87-014-051-080	0E	CAPACITOR (PP), 560P	....E.....
C	949	87-A10-039-080	0E	C-CAP,U 470P-50 J CH	.....FG.....
C	958	87-010-197-080	0E	CAP, CHIP 0.01 DM	.....FG.....
C	956	87-010-263-080	0E	CAP, ELECT 100-10V	....E.....
C	959	87-010-831-080	0E	C-CAP,U,0.1-16F	....EFG.....
C	954	87-012-358-080	0E	C-CAP,S 0.47-10 F Z	....E.....
C	950	87-014-073-080	0E	CAP,PP 4700P-100 J	....E.....
C	963	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABCDEFGH.....
C	962	87-010-401-080	0E	CAP, ELECT 1-50V	.....FG.....
C	964	87-012-170-080	0E	C-CAP,U 8P-50 CH	A.....
C	961	87-012-174-080	0E	CAP CHIP CERA SS 12P CHJ	.BCD...H.....
C	960	87-012-350-080	0E	C-CAP,1-25 F	....E.....
CF	802	82-785-747-010	1A	CF MS2 GHY R	.....FG.....
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	.....FG.....
D	944	87-020-465-080	0E	DIODE,1SS133 (110MA)	....EFG.....
D	942	87-A40-270-080	0E	C-DIODE,MC2838	.....FG.....
D	981	87-A40-618-080	1B	VARI-CAP,SVC 348(S/T)	....E.....
FFE	801	A8-6ZA-190-030	0E	6ZA-1 FEUNM	.....
FFE	801	A8-6ZA-191-130		6ZA-1 FEENM	.....FG.....
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	.B.....
FFE	801	A8-6ZA-193-130		6ZA-1 FEVNM	.....
FFE	801	A8-6ZA-199-170		6ZA-1 FEENC	.....
FFE	801	A8-6ZA-19A-070		6ZA-1 FEJNC	.....
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	A.....H.....
FFE	801	A8-8ZA-190-030		8ZA-1 FEUNM	..C.E.....

ELECTRICAL PARTS LIST-3/3 <ZZA-1>(EZ,K)

FFE	801	A8-8ZA-192-070		8ZA-1 FEUNC	.....
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	...D.....
J	801	87-033-241-010	1B	TERMINAL,ANT AJ-2039	.....FG.....
J	801	87-A60-702-010	1B	TERMINAL,ANT 4P CJ-9036	ABCD...H.....
J	801	87-A60-703-010	1A	TERMINAL,ANT 3P CJ-9037	....E.....
J	940	81-754-629-010	0E	CONNECTOR, 2P	....E.....
L	832	87-005-847-080	0E	COIL,2.2UH(CECS)	.....FG.....
L	943	87-005-372-080	0E	COIL S 1MHM	.....
L	942	87-A50-019-010	0E	COIL,OSC LW(COI)	.....FG.....
L	941	87-A50-020-010	0E	COIL,ANT LW(COI)	.....FG.....
L	941	87-A50-022-010	0E	COIL,ANT SW(COI)	....E.....
L	944	87-A50-159-010	0E	COIL,10MH K C2B	....E.....
L	942	87-A50-173-010	0E	COIL,OSC SW-N(COI)	....E.....
L	943	87-A50-432-010	0E	COIL,1MH K CW	....E.....
L	981	87-A50-430-010	0E	COIL,ANT MW(3BSW)	....E.....
L	982	87-A50-431-010	0E	COIL,OSC MW(3BSW)	....E.....
L	981	87-NF4-650-010	1D	COIL,AM PACK 4N(TOK)	A.....
L	981	87-NF4-651-010	1C	COIL,AM PACK2N(TOM)	.....
L	981	88-NF8-625-110	1D	COIL,AM PACK3N(TOK)	.....
L	981	8Z-ZA1-664-010	1D	COIL,AM PACK 4(TOK)	.BCD...H.....
L	981	8Z-ZA1-665-010	1E	COIL,AM PACK 2(TOK)	.....FG.....
Q	712	87-A30-072-080	0E	C-TR,RT1P 144C	ABCD.FGH.....
Q	805	89-327-143-080	0E	TR,2SC2714 (0.1W)	ABCDEFGH.....
Q	942	87-A30-075-080	0E	C-TR,2SA1235F	....E.....
Q	943	87-A30-075-080	0E	C-TR,2SA1235F	....E.....
Q	944	87-A30-076-080	0E	C-TR,2SC3052F	....E.....
Q	945	87-A30-076-080	0E	C-TR,2SC3052F	....E.....
Q	949	87-A30-076-080	0E	C-TR,2SC3052F	....E.....
Q	948	87-A30-086-070	0E	C-TR,CSD1306E	....EFG.....
Q	947	89-503-602-080	1A	C-FET,2SK360E	....E.....
Q	947	89-505-434-540	0E	C-FET,2SK543(4/5)	.....FG.....
Q	951	87-A30-074-080	0E	C-TR,RT1P 141C	....EFG.....
TC	942	87-011-164-010	0E	CAPACITOR,TRIMMER 30P	.....FG.....
TC	941	87-011-173-010	1A	CERAMIC TRIMMER 20P	.....
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	....E.....
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	....E.....

ELECTRICAL PARTS LIST-1/3 <ZZA-1>(HR)

NOTE: The characters in the suffix column indicate the part usage.

HE2B RTNF .....XX.....C.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 701	87-010-381-080		CAP, ELECT 330-16V	ABC
C 702	87-010-404-080		CAP, ELECT 4.7-50V	ABC
C 711	87-010-260-080		CAP, ELECT 47-25V	ABC
C 711	87-010-553-080		CAP,E 47-16	
C 712	87-010-831-080		C-CAP,U,0.1-16F	ABC
C 718	87-012-179-080		C-CAP,U 20P-50 CH	.B
C 727	87-010-196-080		CHIP CAPACITOR,0.1-25	ABC
C 728	87-010-248-080		CAP, ELECT 220-10V	ABC
C 722	87-012-176-080		CAP 15P	ABC
C 721	87-012-176-080		CAP 15P	ABC
C 720	87-012-195-080		C-CAP,U 100P-50CH	ABC
C 729	87-012-274-080		CHIP CAP,U 1000P-50B	ABC
C 725	87-018-131-080		CAP, CER 1000P-50V	
C 805	87-012-286-080		CAP, U 0.01-25	ABC
C 806	87-012-286-080		CAP, U 0.01-25	ABC
CN 701	87-A60-650-010		CONN,16P H GRY TUC-P16X-C1	
CN 701	87-A60-700-010		CONN,13P H GRY TUC-P13X-C1	ABC
D 721	87-017-149-080		ZENER,HZS6A2L	ABC
D 722	87-020-465-080		DIODE,1SS133 (110MA)	
IC 721	87-070-127-110		IC,LC72131 D	ABC
Q 712	87-A30-072-080		C-TR,RT1P 144C	
Q 713	87-A30-072-080		C-TR,RT1P 144C	
Q 711	87-A30-234-080		TR,CSC4115BC	ABC
X 721	87-A70-061-010		VIB,XTAL 4.500MHZ CSA-309	ABC
C 872	87-010-400-080		CAP, ELECT 0.47-50V	
C 873	87-010-404-080		CAP, ELECT 4.7-50V	
C 877	87-012-278-080		C-CAP,U 2200P-50 B	
C 878	87-012-278-080		C-CAP,U 2200P-50 B	
C 889	87-010-248-080		CAP, ELECT 220-10V	
C 884	87-010-260-080		CAP, ELECT 47-25V	
C 883	87-010-404-080		CAP, ELECT 4.7-50V	
C 885	87-010-545-080		CAP, ELECT 0.22-50V	
C 886	87-010-545-080		CAP, ELECT 0.22-50V	
C 888	87-010-787-080		CAP, U 0.022-25	
C 881	87-012-141-080		CHIP-CAPACITOR,0.22-16F	
C 882	87-012-172-080		CAPACITOR CHIP U 10P CH	
C 887	87-012-286-080		CAP, U 0.01-25	
C 886	87-016-460-080		C-CAP,S 0.22-16 B	
C 885	87-016-460-080		C-CAP,S 0.22-16 B	
IC 871	87-070-060-040		IC,TA2040AF	
Q 873	87-026-226-080		CHIP-TR,DTA143EK	
X 891	87-030-394-010		VIB,CER CSA3.6MGF228	
C 705	87-A10-592-080		C-CAP,S 0.015-50 J B	ABC
C 706	87-A10-592-080		C-CAP,S 0.015-50 J B	ABC
C 733	87-010-987-080		C-CAP,S 1500P-50 CH	ABC
C 736	87-010-987-080		C-CAP,S 1500P-50 CH	ABC
C 735	87-010-987-080		C-CAP,S 1500P-50 CH	ABC
C 734	87-010-987-080		C-CAP,S 1500P-50 CH	ABC
C 733	87-012-280-080		CAP, U 3300P-50	
C 734	87-012-280-080		CAP, U 3300P-50	
C 737	87-A10-592-080		C-CAP,S 0.015-50 J B	ABC
C 738	87-A10-592-080		C-CAP,S 0.015-50 J B	ABC
C 752	87-010-220-080		C-CAP,S 0.018-25 B	.BC
C 751	87-010-220-080		C-CAP,S 0.018-25 B	.BC
C 758	87-012-167-080		C-CAP,U 5P-50 CH	ABC
C 757	87-012-188-080		C-CAP,U 47P-50 CH	ABC
C 753	87-012-195-080		C-CAP,U 100P-50CH	
C 752	87-012-282-080		CAP, U 4700P-50	
C 756	87-012-286-080		CAP, U 0.01-25	ABC
C 751	87-012-365-080		C-CAP,S 0.027-25VBK	A
C 752	87-012-365-080		C-CAP,S 0.027-25VBK	A
C 766	87-010-197-080		CAP, CHIP 0.01 DM	
C 769	87-010-260-080		CAP, ELECT 47-25V	ABC
C 768	87-012-286-080		CAP, U 0.01-25	ABC
C 765	87-012-286-080		CAP, U 0.01-25	ABC
C 764	87-012-337-080		C-CAP,U 56P-50 CH	ABC
C 774	87-010-263-080		CAP, ELECT 100-10V	ABC
C 771	87-010-383-080		CAP, ELECT 33-25V	ABC
C 777	87-010-400-080		CAP, ELECT 0.47-50V	ABC
C 775	87-010-404-080		CAP, ELECT 4.7-50V	ABC
C 777	87-010-493-080		CAP,E 0.47-50 GAS	
C 770	87-010-829-080		CAP, U 0.047-16	ABC
C 780	87-010-196-080		CHIP CAPACITOR,0.1-25	ABC
C 786	87-010-401-080		CAP, ELECT 1-50V	ABC
C 785	87-010-401-080		CAP, ELECT 1-50V	ABC
C 786	87-010-402-080		CAP, ELECT 2.2-50V	
C 785	87-010-402-080		CAP, ELECT 2.2-50V	
C 782	87-010-405-080		CAP, ELECT 10-50V	ABC
C 781	87-010-405-080		CAP, ELECT 10-50V	ABC
C 786	87-010-494-080		CAP ELECT GAS 1/50	
C 785	87-010-494-080		CAP ELECT GAS 1/50	

ELECTRICAL PARTS LIST-2/3 <ZZA-1>(HR)

C	787	87-012-275-080	C-CAP,U 1200P-50 B	ABC.....
C	788	87-012-275-080	C-CAP,U 1200P-50 B	ABC.....
C	784	87-012-286-080	CAP, U 0.01-25	ABC.....
C	796	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	791	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	794	87-010-406-080	CAP, ELECT 22-50	ABC.....
C	795	87-010-596-080	CAP, S 0.047-16	ABC.....
C	793	87-012-273-080	C-CAP,U 820P-50 B	ABC.....
C	798	87-012-276-080	CAP, CHIP SS 1500 PBK	.....
C	797	87-012-276-080	CAP, CHIP SS 1500 PBK	.....
D	771	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
IC	771	87-A20-913-010	IC,LA1837NL	ABC.....
L	771	87-A50-266-010	COIL,FM DET-2N(TOK)	ABC.....
L	772	87-A90-052-010	FLTR,CFMT-450A(TOK)	.....
L	772	87-A90-053-010	FLTR,PCFMT-060(TOK)	.....
L	772	87-A91-110-010	FLTR,PCFJZH-450 (TOK)	ABC.....
L	781	87-005-847-080	COIL,2.2UH(CECS)	.....
L	791	87-A50-027-010	COIL,1 POLE MPX(TOK)	.....
L	792	87-A50-027-010	COIL,1 POLE MPX(TOK)	.....
X	771	87-030-354-010	VIB,CF BFU 450C	.....
C	859	87-012-286-080	CAP, U 0.01-25	.....
C	865	87-010-196-080	CHIP CAPACITOR,0.1-25	.....
C	864	87-010-405-080	CAP, ELECT 10-50V	.....
C	866	87-010-405-080	CAP, ELECT 10-50V	.....
C	869	87-012-180-080	C-CAP,U 22P-50 CH	.....
C	868	87-012-184-080	C-CAP,U 33P-50 CH	.....
C	861	87-012-199-080	CAP 220P	.....
C	862	87-012-199-080	CAP 220P	.....
C	863	87-012-270-080	CAP, U 470P-50	.....
C	867	87-012-286-080	CAP, U 0.01-25	.....
IC	851	87-A20-440-040	C-IC,BU1920FS	.....
L	851	87-005-847-080	COIL,2.2UH(CECS)	.....
Q	853	87-A30-076-080	C-TR,2SC3052F	.....
X	851	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	.....
C	808	87-012-286-080	CAP, U 0.01-25	ABC.....
C	801	87-012-286-080	CAP, U 0.01-25	ABC.....
C	809	87-012-286-080	CAP, U 0.01-25	ABC.....
C	803	87-012-286-080	CAP, U 0.01-25	ABC.....
C	804	87-012-286-080	CAP, U 0.01-25	ABC.....
C	802	87-012-286-080	CAP, U 0.01-25	ABC.....
C	807	87-012-286-080	CAP, U 0.01-25	ABC.....
C	810	87-012-286-080	CAP, U 0.01-25	ABC.....
C	820	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	894	87-012-286-080	CAP, U 0.01-25	ABC.....
C	893	87-012-286-080	CAP, U 0.01-25	ABC.....
C	942	87-012-168-080	C-CAP,U 6P-50 CH	.....
C	941	87-012-180-080	C-CAP,U 22P-50 CH	.....
C	944	87-014-051-080	CAPACITOR (PP), 560P	.....
C	949	87-A10-039-080	C-CAP,U 470P-50 J CH	.....
C	958	87-010-197-080	CAP, CHIP 0.01 DM	.....
C	956	87-010-263-080	CAP, ELECT 100-10V	.....
C	959	87-010-831-080	C-CAP,U,0.1-16F	.....
C	954	87-012-358-080	C-CAP,S 0.47-10 F Z	.....
C	950	87-014-073-080	CAP,PP 4700P-100 J	.....
C	963	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
C	962	87-010-401-080	CAP, ELECT 1-50V	.....
C	961	87-012-174-080	CAP CHIP CERA SS 12P CHJ	ABC.....
C	960	87-012-350-080	C-CAP,1-25 F	.....
CF	802	82-785-747-010	CF MS2 GHY R	.....
CF	802	87-008-261-010	FILTER, SFE10.7MA5-A	ABC.....
CF	801	87-008-261-010	FILTER, SFE10.7MA5-A	ABC.....
CF	801	87-008-423-010	CERAMIC FILTER, SFE10.7	.....
D	944	87-020-465-080	DIODE,1SS133 (110MA)	.....
D	942	87-A40-270-080	C-DIODE,MC2838	.....
D	981	87-A40-618-080	VARI-CAP,SVC 348(S/T)	.....
FFE	801	A8-6ZA-191-130	6ZA-1 FEENM	.....
FFE	801	A8-6ZA-192-030	6ZA-1 FEJNM	.....
FFE	801	A8-6ZA-193-130	6ZA-1 FEVNM	.B.....
FFE	801	A8-6ZA-199-170	6ZA-1 FEENC	.....
FFE	801	A8-6ZA-19A-070	6ZA-1 FEJNC	.....
FFE	801	A8-6ZA-19D-070	6ZA-1 YFEJNC	.....
FFE	801	A8-8ZA-190-030	8ZA-1 FEUNM	..C.....
FFE	801	A8-8ZA-191-030	8ZA-1 YFEUNM	A.....
FFE	801	A8-8ZA-192-070	8ZA-1 FEUNC	.....
FFE	801	A8-8ZA-193-070	8ZA-1 YFEUNC	.....
J	801	87-033-241-010	TERMINAL,ANT AJ-2039	.....
J	801	87-A60-702-010	TERMINAL,ANT 4P CJ-9036	ABC.....
J	801	87-A60-703-010	TERMINAL,ANT 3P CJ-9037	.....
J	940	81-754-629-010	CONNECTOR, 2P	.....
L	832	87-005-847-080	COIL,2.2UH(CECS)	.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	.....
L	941	87-A50-020-010	COIL,ANT LW(COI)	.....
L	941	87-A50-022-010	COIL,ANT SW(COI)	.....
L	944	87-A50-159-010	COIL,10MH K C2B	.....
L	942	87-A50-173-010	COIL,OSC SW-N(COI)	.....
L	943	87-A50-432-010	COIL,1MH K CW	.....
L	981	87-A50-430-010	COIL,ANT MW(3BSW)	.....

ELECTRICAL PARTS LIST-3/3 <ZZA-1>(HR)

L	982	87-A50-431-010	COIL,OSC MW(3BSW)	.....
L	981	8Z-ZA1-650-010	COIL,AM PACK4C (TOK)	..C.....
L	981	8Z-ZA1-664-010	COIL,AM PACK 4(TOK)	AB.....
L	981	8Z-ZA1-665-010	COIL,AM PACK 2(TOK)	.....
Q	712	87-A30-072-080	C-TR,RT1P 144C	ABC.....
Q	805	89-327-143-080	TR,2SC2714 (0.1W)	ABC.....
Q	942	87-A30-075-080	C-TR,2SA1235F	.....
Q	943	87-A30-075-080	C-TR,2SA1235F	.....
Q	945	87-A30-076-080	C-TR,2SC3052F	.....
Q	944	87-A30-076-080	C-TR,2SC3052F	.....
Q	949	87-A30-076-080	C-TR,2SC3052F	.....
Q	948	87-A30-086-070	C-TR,CSD1306E	.....
Q	947	89-503-602-080	C-FET,2SK360E	.....
Q	947	89-505-434-540	C-FET,2SK543(4/5)	.....
Q	951	87-A30-074-080	C-TR,RT1P 141C	.....
TC	942	87-011-164-010	CAPACITOR,TRIMMER 30P	.....
TC	941	87-011-220-080	TRIMMER CAP 20P VTC	.....
TC	943	87-011-221-080	CAP, TRIMMER 30P	.....

MECHANICAL PARTS LIST - 1/2

'•‹L: ƒTƒtƒBƒbƒNƒX—“,ÌƒAƒ‹ƒtƒ@ƒxƒbƒg,Í•”•i,ð•g—p,µ,Ä,¢,é•–,ð•¦,µ,Ä,¢,Ü,·•B
NOTE: The characters in the suffix column indicate the part usage.

HRSF		XX		D
K		XX		E
151EZ		XX		F
152EZ		XX		G

¶ÝØ

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-CL9-003-110		CABI,FR SI-MB	..CDE
	8A-CL9-004-110		CABI,FR SI-MS R	......G
	8A-CL9-011-010		PANEL,REAR USC	.B
	8A-CL9-012-010		PANEL,REAR HRJ	..C
	8A-CL9-013-010		PANEL,REAR EZSC	.....F
	8A-CL9-015-010		PANEL,REAR LHSC	A
	8A-CL9-016-010		PANEL,REAR KSC	....E
	8A-CL9-017-010		PANEL,REAR EZ152	......G
	8A-CL9-018-010		PANEL,REAR HTSF	
	8A-CL9-019-010		PANEL,REAR HRSF	...D
	8A-CL9-027-010		CABI,TOP U	
	8A-CL9-030-010		PANEL,TRAY ASSY	AB....G
	8A-CL9-033-010		PANEL,TRAY SG A	..CDEF
	8A-CL9-046-010		BOX,CASS U	.B..E
	8A-CL9-047-010		BOX,CASS H	A.CD
	8A-CL9-048-010		BOX,CASS EZ	.....F
	8A-CL9-049-010		BOX,CASS M152	......G
*	8A-CL9-001-010	1H	CABI,FRONT U	AB
*	8A-CL9-001-110		CABI,FR SI-MS	
*	8A-CL9-002-010	1H	CABI,FRONT EZ	
*	8A-CL9-002-110		CABI,FR SI-MB R	.....F
*	8A-CL9-026-010		CABI,TOP	ABCDEFG
	8A-CL9-062-010		KEY,POWER	ABCDEFG
	8A-CL9-063-010		KEY,FUNC ASSY	ABCDEFG
	8A-CL9-065-010		KEY,OPEN	ABCDEFG
	8A-CL9-066-010		KEY,CONTROL	ABCDEFG
	8A-CL9-067-010		KEY,Q-SOUND	ABCDEFG
	8A-CL9-068-010		KEY,JOGMODE	ABCDEFG
	8A-CL9-069-010		KEY,DEMO	ABCDEFG
	8A-CL9-080-010		KNOB,RTRY VOLUME	ABCDEFG
	8A-CL9-051-010		WINDOW,DISPLAY U	AB
	8A-CL9-052-010		WINDOW,CASS	AB....G
	8A-CL9-053-010		WINDOW,DISPLAY EZ	.....F
	8A-CL9-054-010		WINDOW,CASS SG	..CDEF
	8A-CL9-055-010		WINDOW,DISP SK R	......G
	8A-CL9-056-010		WINDOW,DISP SG	..CDE
	8A-CL9-077-010		RING,VOLUME	ABCDEFG
	8A-CL9-085-010		REFLECTOR,LED-FUNC	ABCDEFG
	8A-CL9-088-010	0E	LENS,REMOTE-C	AB
	8A-CL9-088-110		LENS,REMOTE-C	..CDEFG
	8A-CL9-095-010		PLATE,FL	..CDEFG
*	8A-MA6-203-010		PLATE,FL	AB
	82-NF5-229-010		PLATE,LOCK	ABCDEFG
	82-ZM1-264-010		LVR,EJECT R	ABCDEFG
	86-NF9-224-010		SPR-C,LOCK	ABCDEFG
	87-NF4-217-110		HLDR,LOCK 2	ABCDEFG
	87-NF8-220-010		DMPR,150	ABCDEFG
	88-CL4-215-010		CUSH,FOOT FR	ABCDEFG
	88-CL4-216-010		CUSH,FOOT REAR	ABCDEFG
	88-CL4-220-010		SPR-T,CASS	ABCDEFG
	8A-CL9-203-010		HLDR,CD U	
*	8A-CL9-202-010		HLDR,CD	ABCDEFG
*	8A-CL9-206-010		GUIDE,LED-FUNC	ABCDEFG
*	8A-CL9-211-010		HLDR,TRANS	AB
*	8A-CL9-211-110		HLDR,TRANS	..CDEFG
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABCDEFG
	87-067-758-010	0E	BVT2+3-12 W/O SLOT	AB
	87-571-032-410		VIT+2-3	ABCDEFG
	87-581-170-410		UIT+4-8	..CDEFG
*	87-B10-230-010		BVT2+3-10 W/O SLOT SILVER CR	ABCDEFG
*	87-B10-231-010		QT1+3-12 SILVER CR	ABCDEFG
*	87-B10-250-010		BVT2+3-12 W/O SLOT CR SILVER	ABCDEFG
	87-018-101-080		CAP,TC-U 5.6P-50 SL	....EFG
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABCDEFG
	87-099-811-010		PLUG,ADPTR CONV(K)	....E
	87-A10-207-080		CAP,TCS 0.01-50KBUP050	..CDEFG
	87-A80-092-010	1C	AC CORD ASSY,E BLK SUN FAI	A
	87-A80-110-010	1B	AC CORD ASSY,U SPT-2W	
	87-A80-143-010	1C	AC CORD ASSY,E BLK	
	87-A80-148-010		AC CORD ASSY,E BLK	..CD.FG
	87-A80-149-010		AC CORD ASSY,U BLK	.B
	87-A80-157-010		AC CORD ASSY,E BLK CC	....E
	87-A90-562-010		F-BEAD,9.5-17.5-28.5 BRH	....EFG
	88-905-231-110		FF-CABLE, 5P 1.25 230MM	ABCDEFG
	88-906-131-110		FF-CABLE,6P 1.25	ABCDEFG
	88-915-231-110		FF-CABLE,15P 1.25 230MM	ABCDEFG
	88-CL4-701-010		CONN ASSY,7P RPEH	ABCDEFG

MECHANICAL PARTS LIST - 2/2

		88-CL4-704-010	FF-CABLE, 16P 1.0	ABCDEFG.....
F	101	87-035-454-010	FUSE,1.6A 250V T W/C	A.CD.....
PT	101	8A-CL9-642-010	PT,U	.B.....
PT	101	8A-CL9-643-010	PT,EZ	....EFG.....
PT	101	8A-CL9-644-010	PT,LH	A.CD.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	ABCDEFG.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

```
HRSF ....................XX.....................................D.................
K .......................XX.....................................E.................
151EZ ...................XX.....................................F.................
152EZ ...................XX.....................................G.................
```

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8A-CL9-901-010		IB,U (ESF)-C	.....
	8A-CL9-902-010		IB,H (ECA)-C	.....
	8A-CL9-903-010		IB,LH (ESP)-C	A.....
	8A-CL9-904-010		IB,K (E)-C	.....
	8A-CL9-905-010		IB,E (9L)-C	.....
	8A-CL9-907-010		IB,U (ESF)-IN	.B.....
	8A-CL9-908-010		IB,H (ECA)-IN	..CD.....
	8A-CL9-909-010		IB,LH (ESP)-IN	.....
	8A-CL9-910-010		IB,K (E)-IN	....E.....
	8A-CL9-911-010		IB,E (9L)-IN	.....FG.....
	8A-CL9-912-010	1B	IB,E (9L) M152-IN	.....
	87-043-115-010		ANT,FEEDER FM	ABCD.....
	87-A90-030-010		ANT,LOOP AM-NC C	ABCDEFG.....
	87-A90-118-010		ANT,WIRE FM (Z)	....EFG.....
	87-A91-017-010		PLUG,CONVERSION JT-0476	A.CD.....
	8A-CLB-961-010		RC UNIT,RC-AAT11	ABCDEFG.....

SCHEMATIC DIAGRAM – 1 (MAIN)

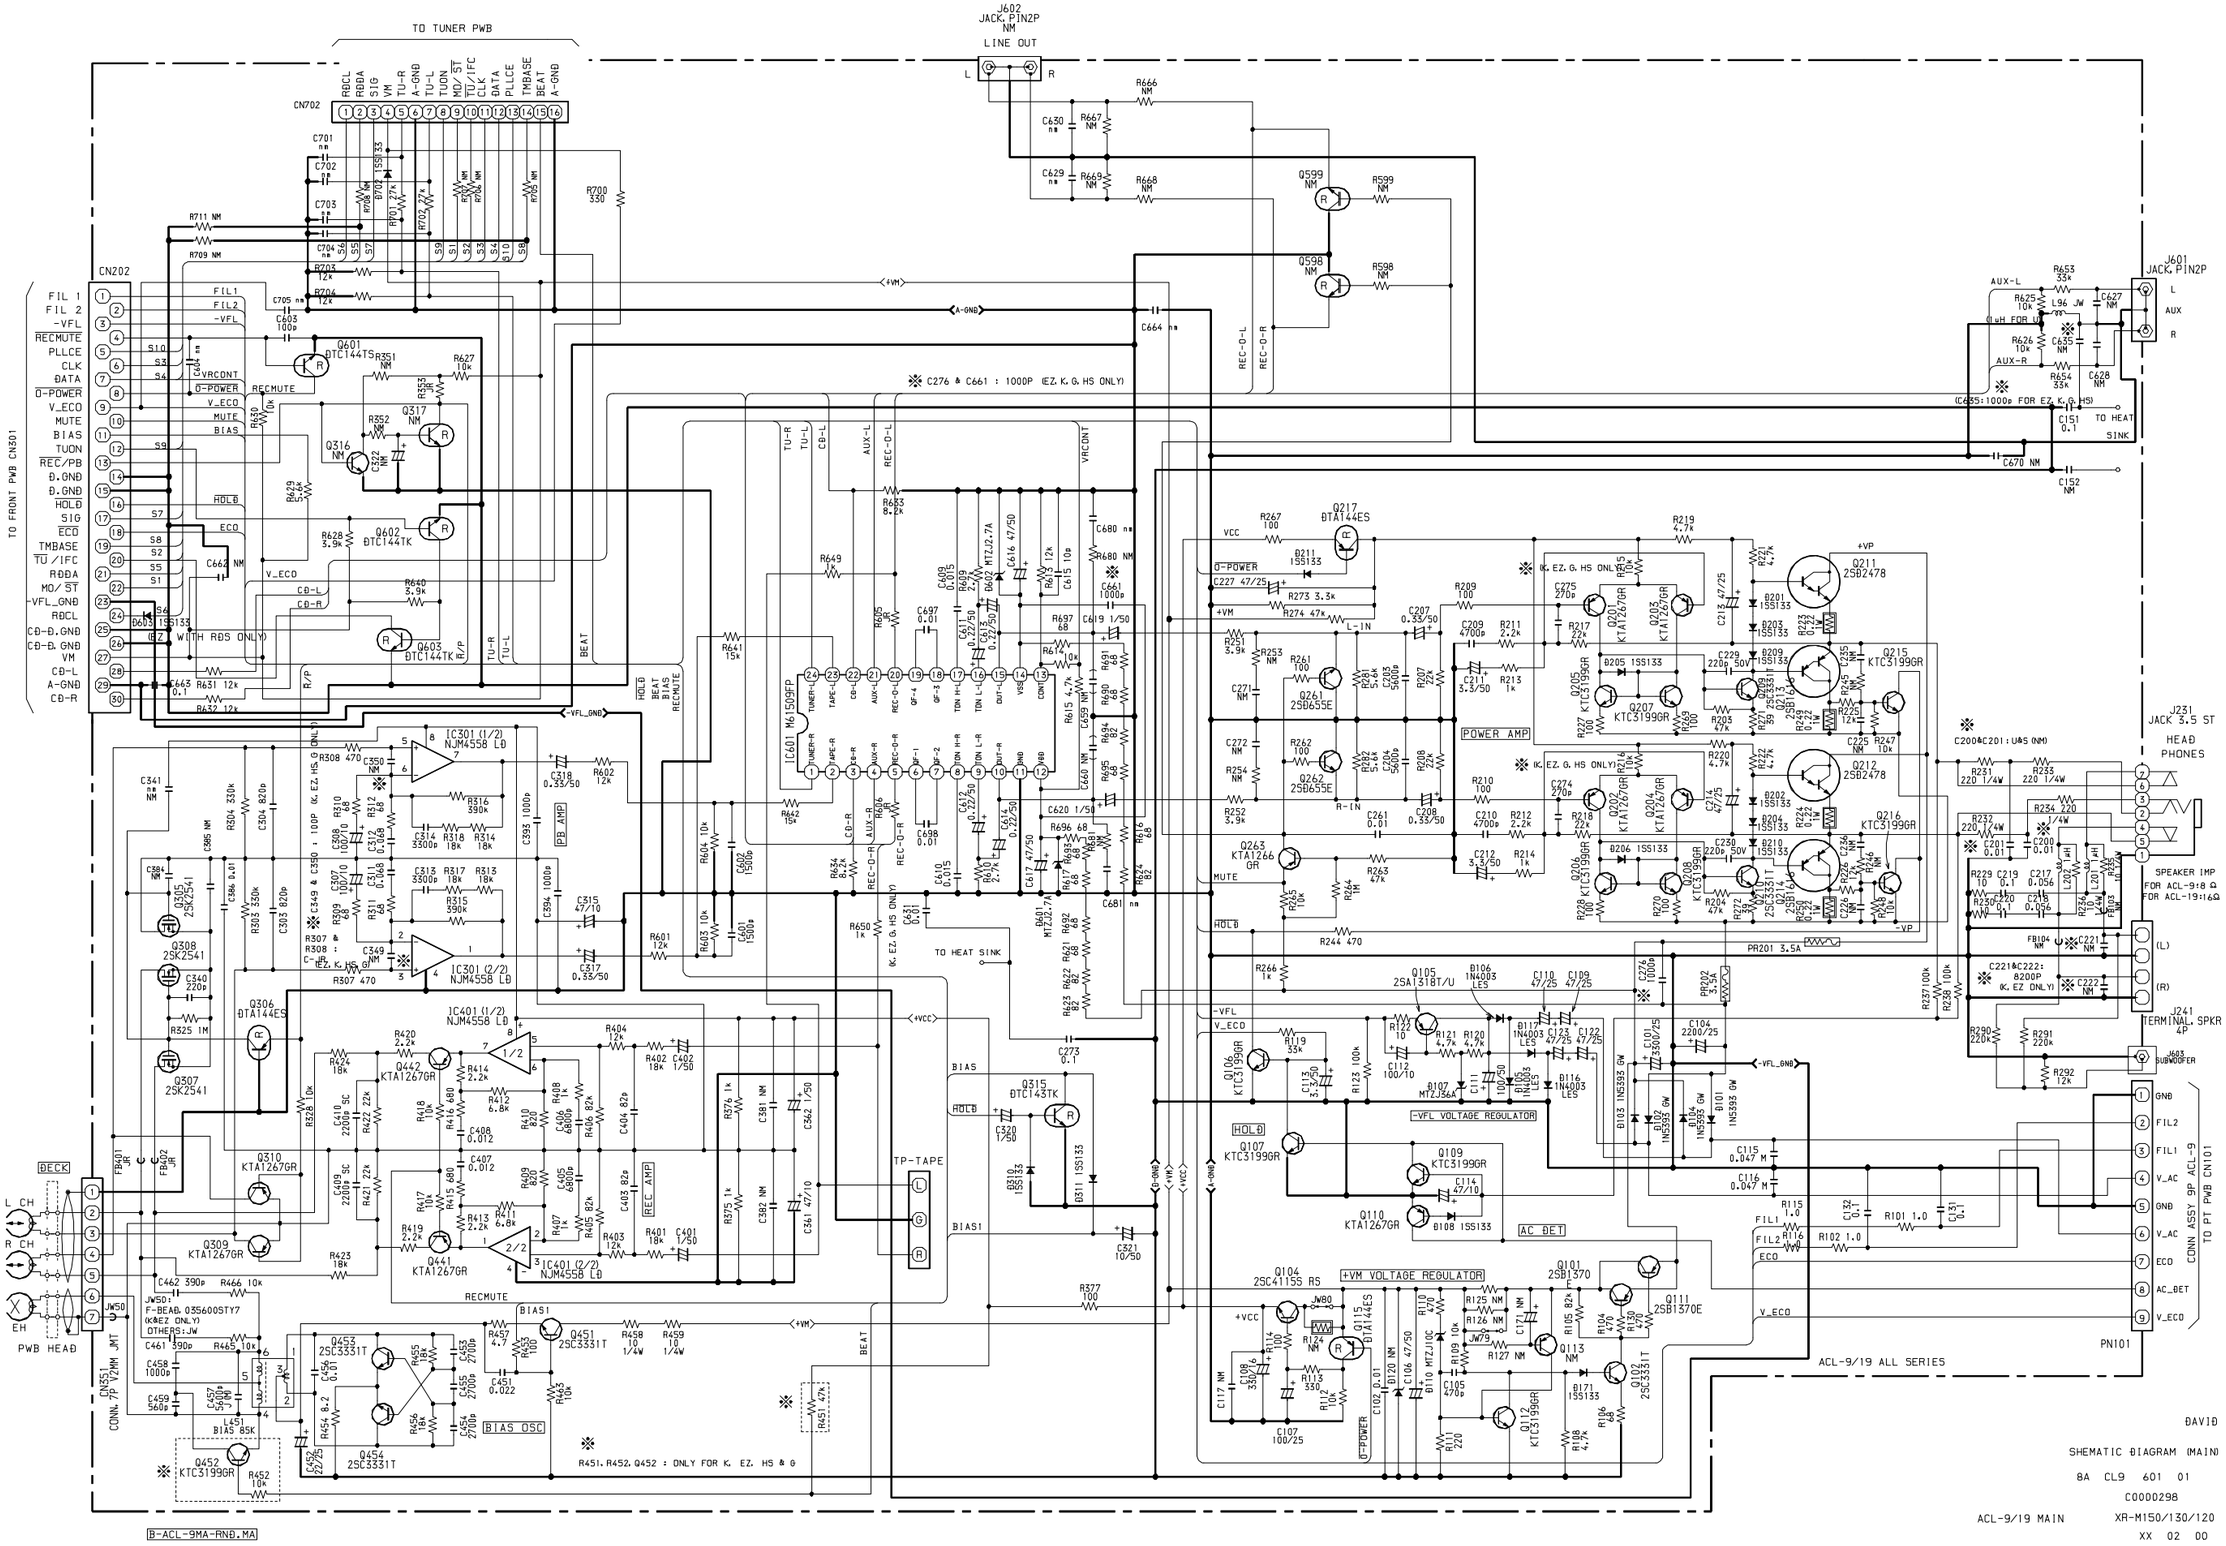

SCHEMATIC DIAGRAM – 2 (TUNER)

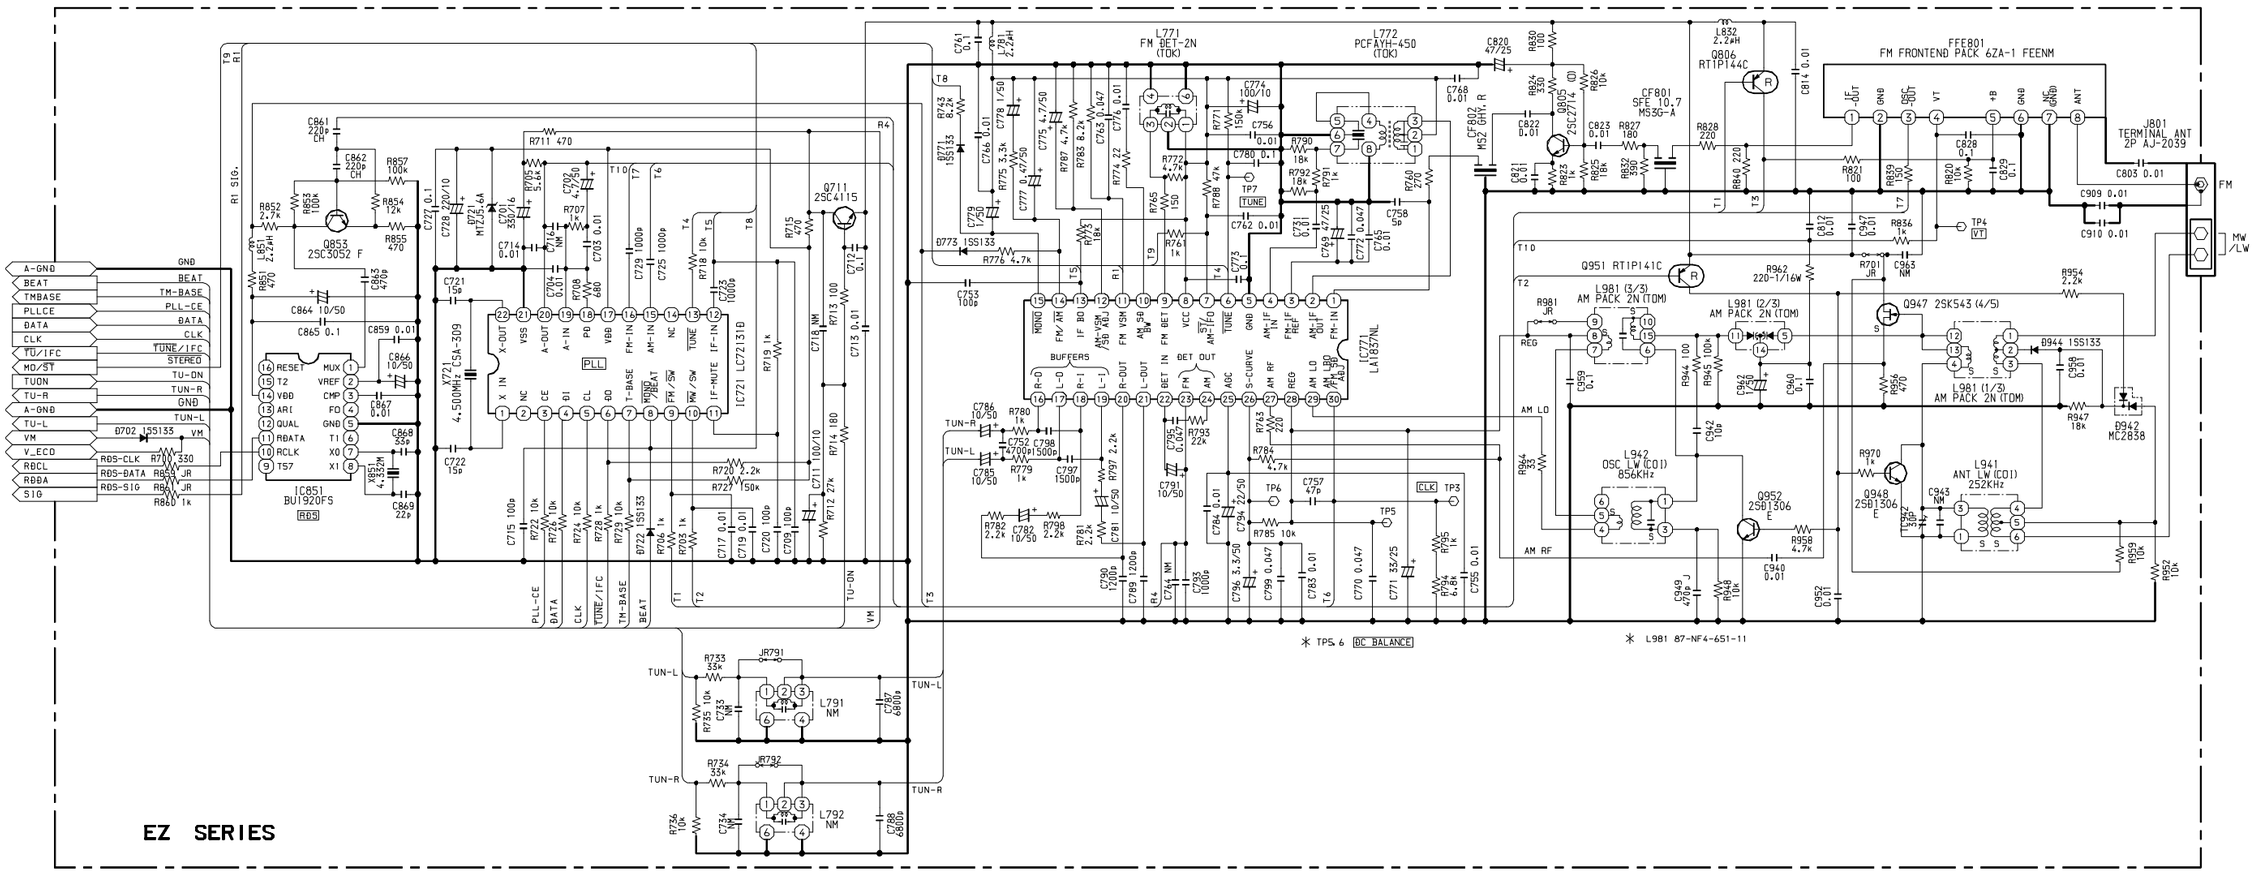

B-ACL-9TU-EZ-RNÐ.P1

ÐAVIÐ

TUNER, EZ

ACL-9

XR-M
XX 06 99

SCHEMATIC DIAGRAM – 3 (FRONT)

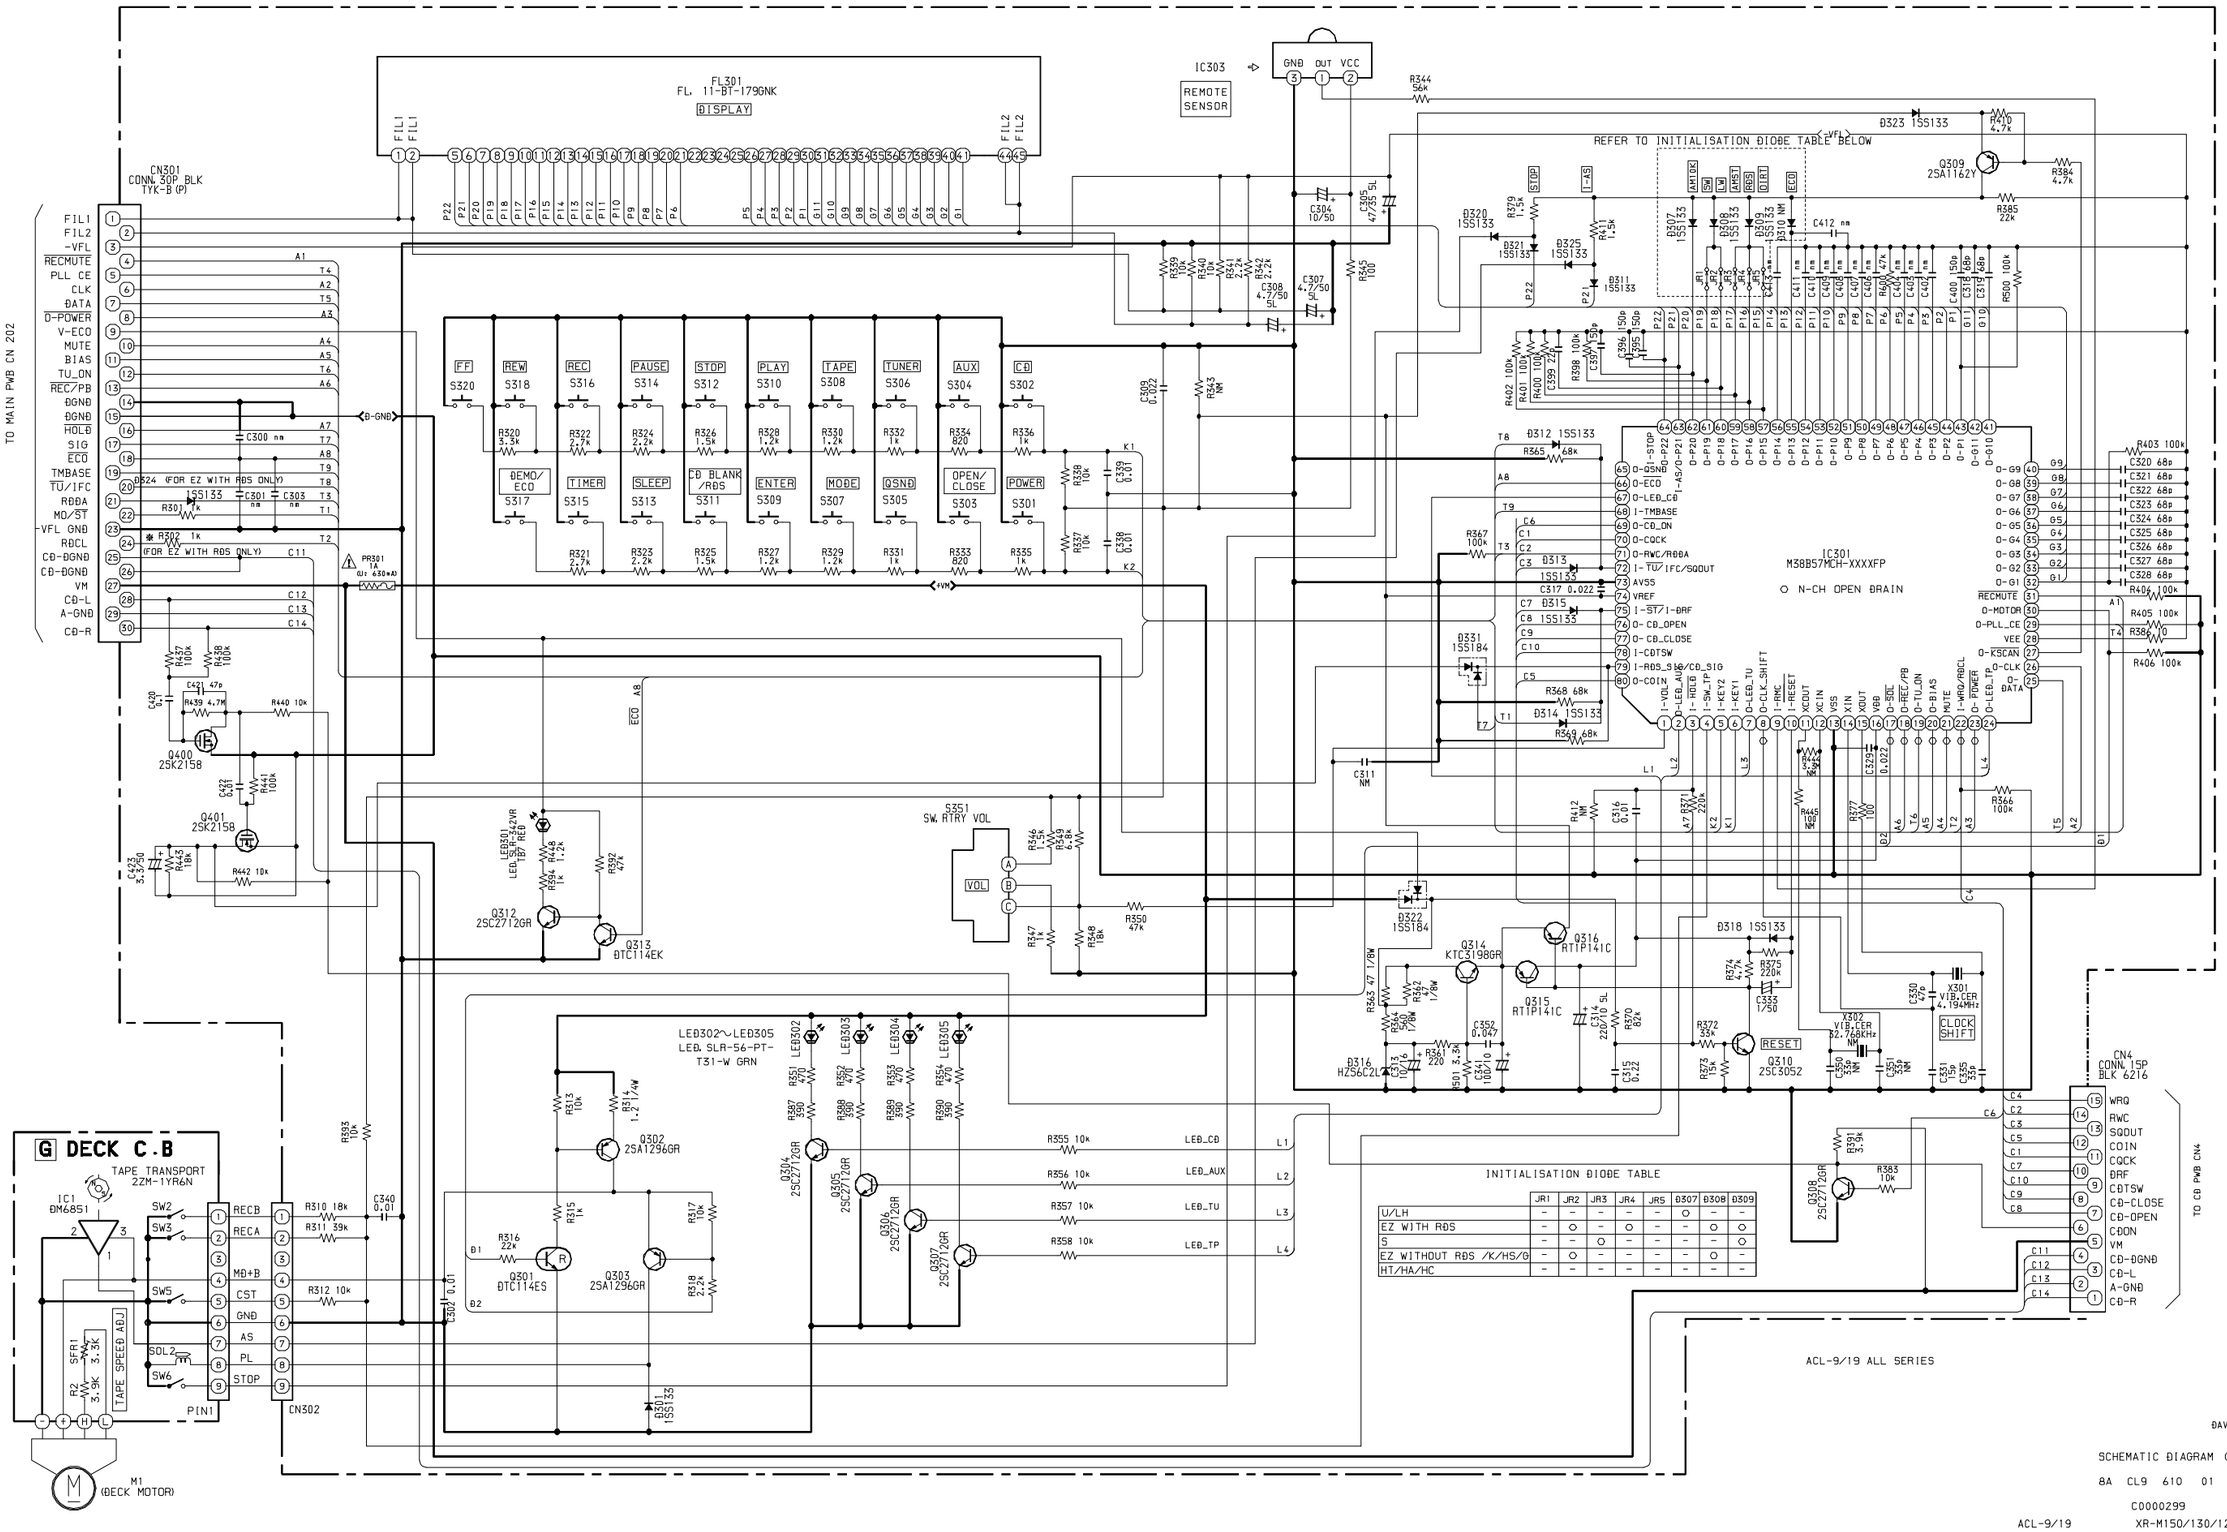

SCHEMATIC DIAGRAM – 4 (CD)

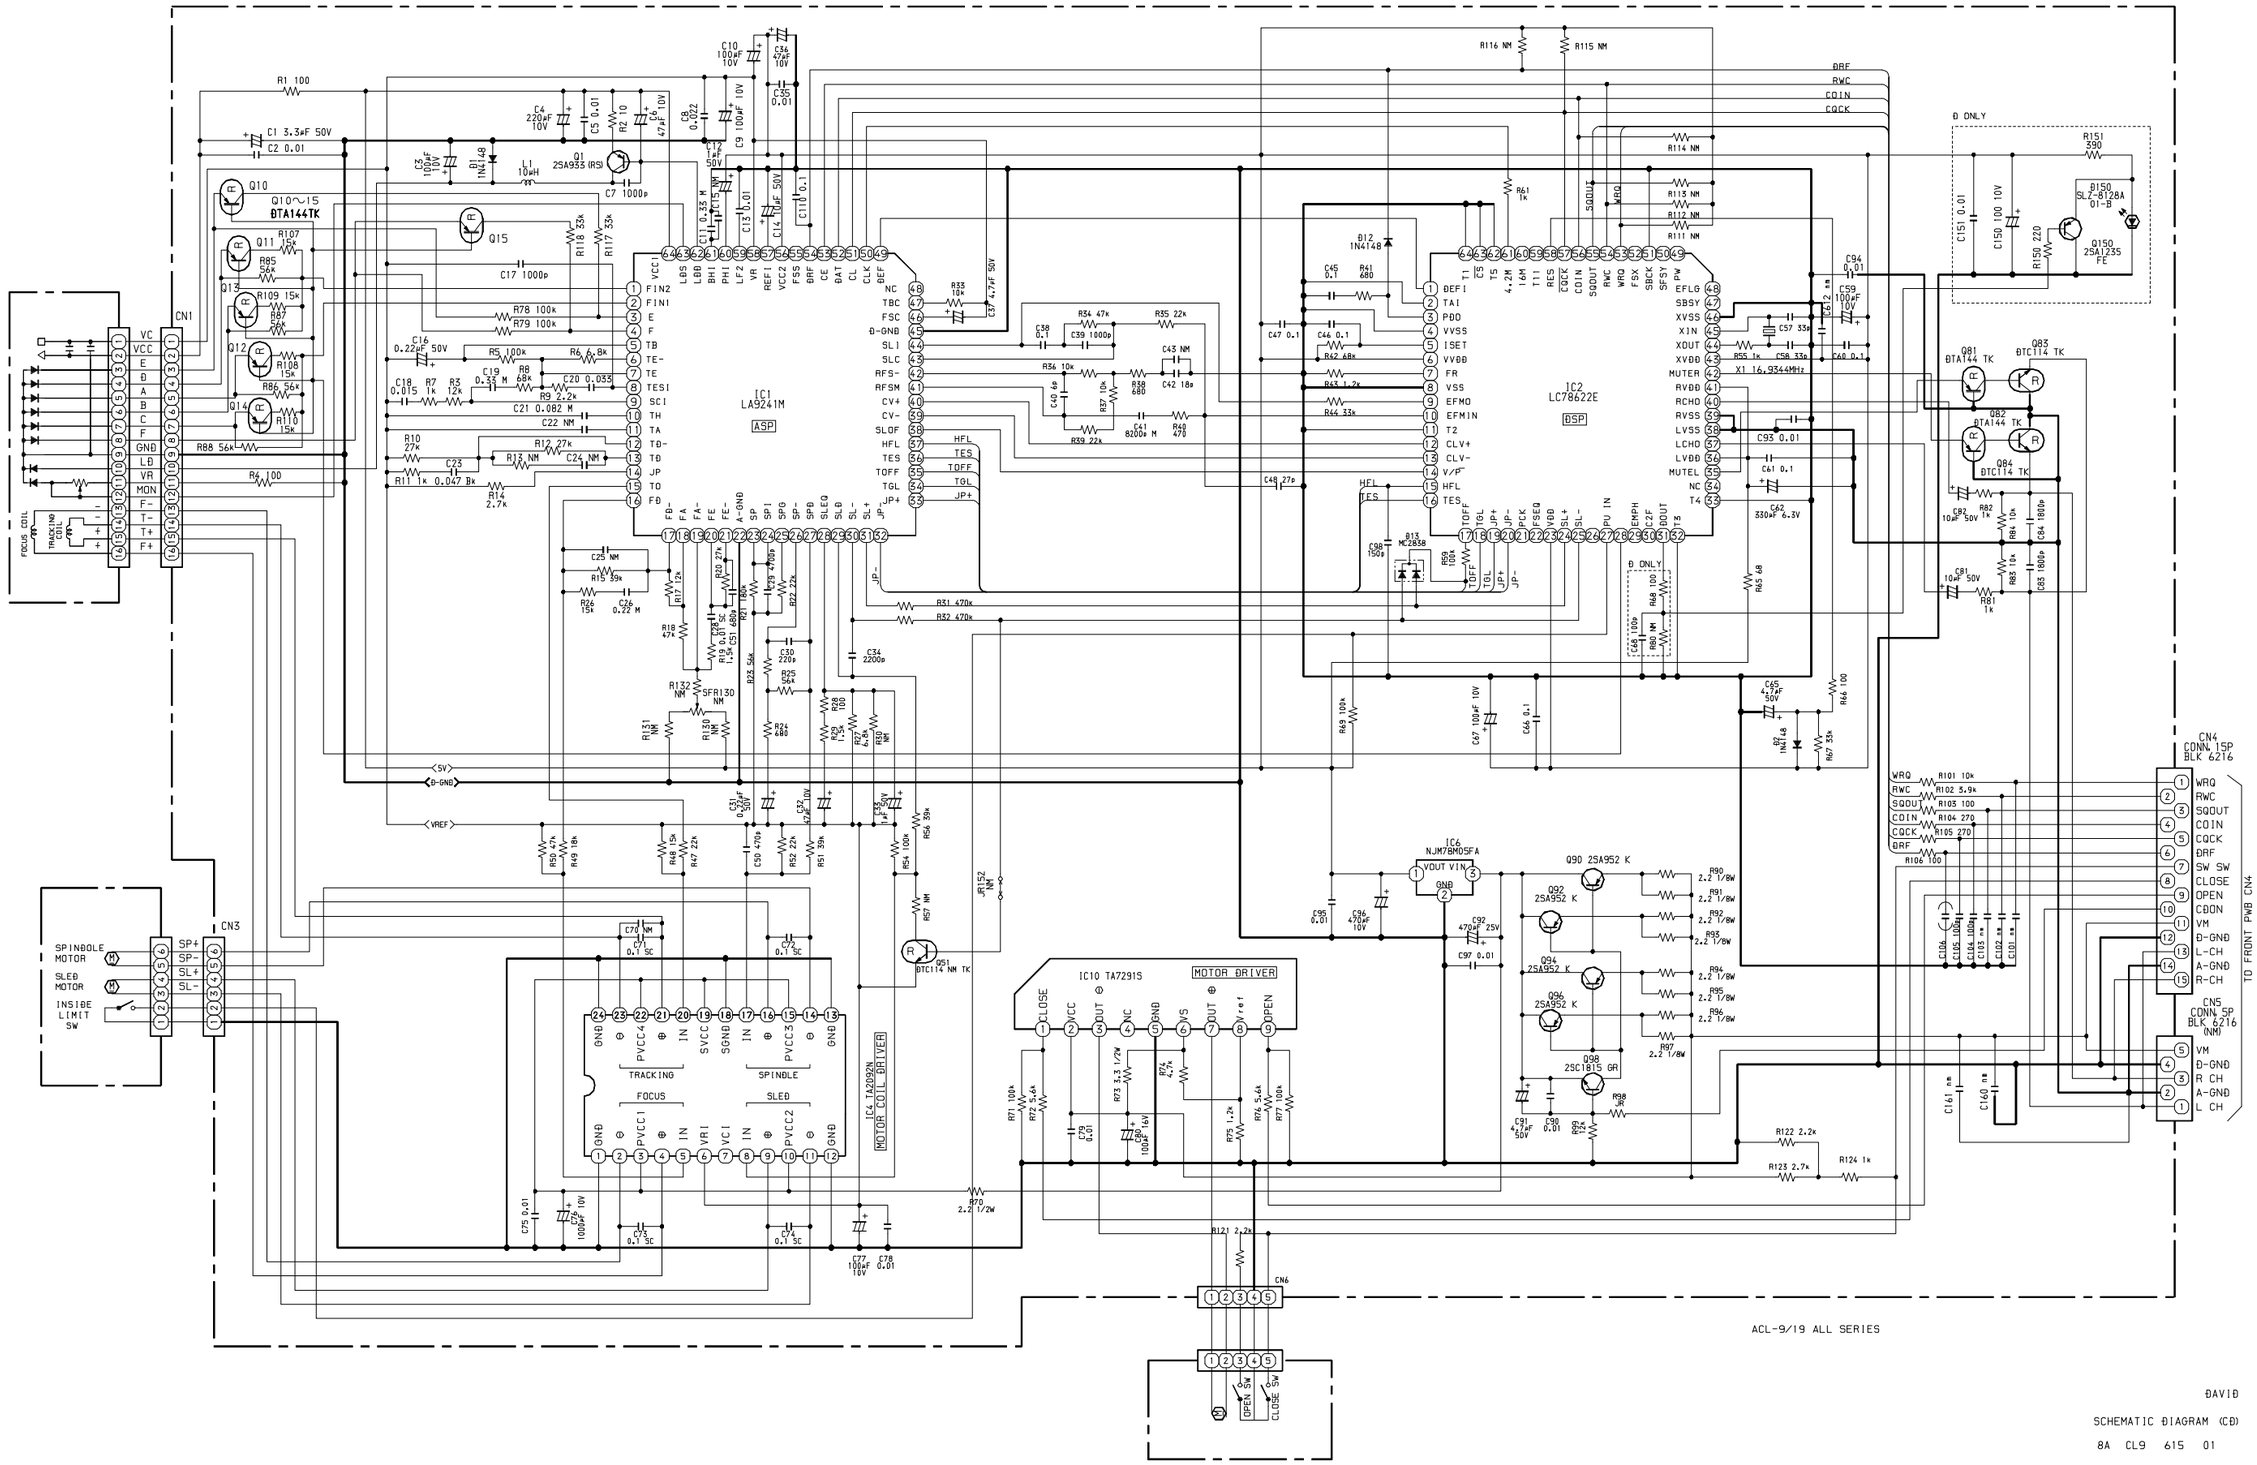

ĐAVIĐ

SCHEMATIC ĐIAGRAM (CĐ)

8A CL9 615 01

C0000301

ACL-9/19 XR-M150/130/120

XX 02 00

SCHEMATIC DIAGRAM – 5 (PT: LH)

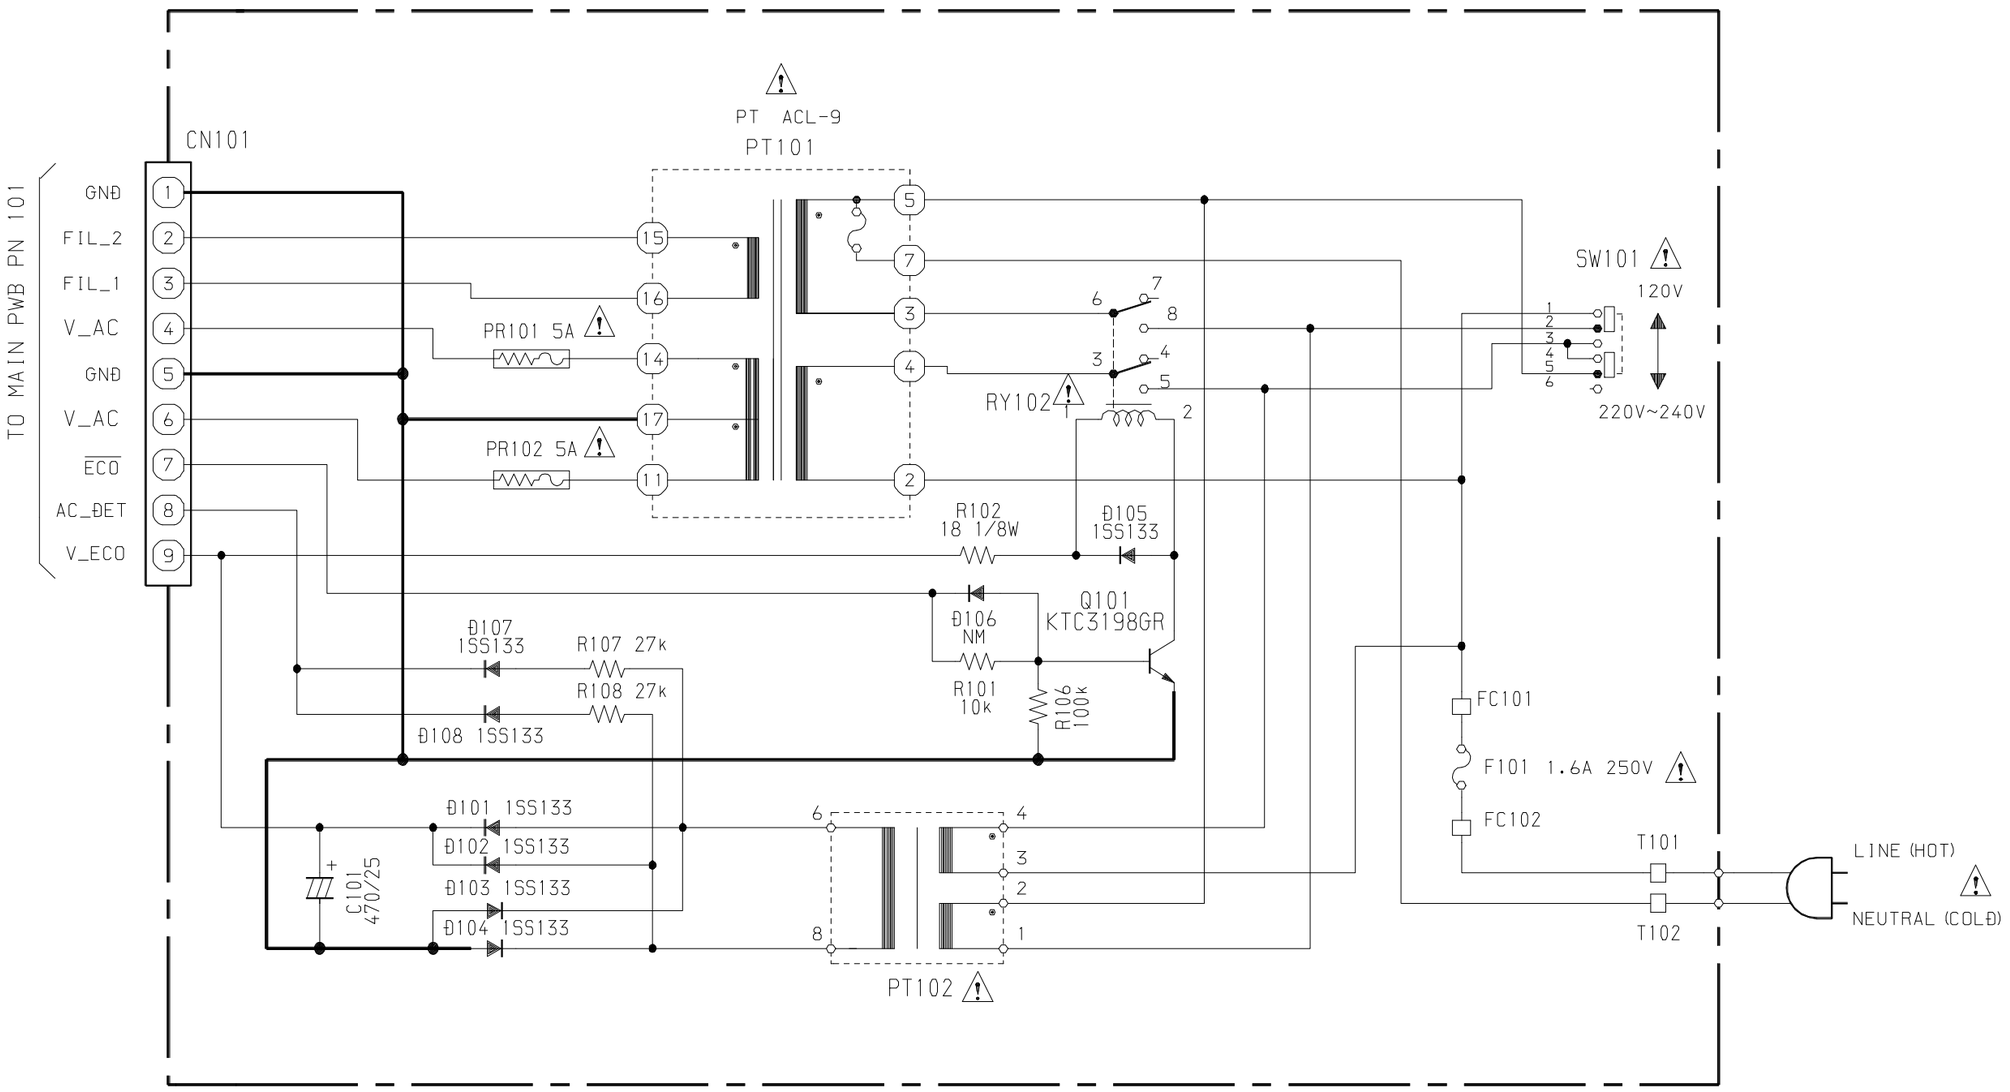

ACL-9/19 LH, HE, HC, HT & HR SERIES

ĐAVIĐ

SCHEMATIC ĐIAG (PT)

8A CL9 607 01

C0000296

ACL-9/19 XR-M130/120

XX 02 00

B-ACL-9PT-RNĐ.PT

SCHEMATIC DIAGRAM – 6 (PT: U)

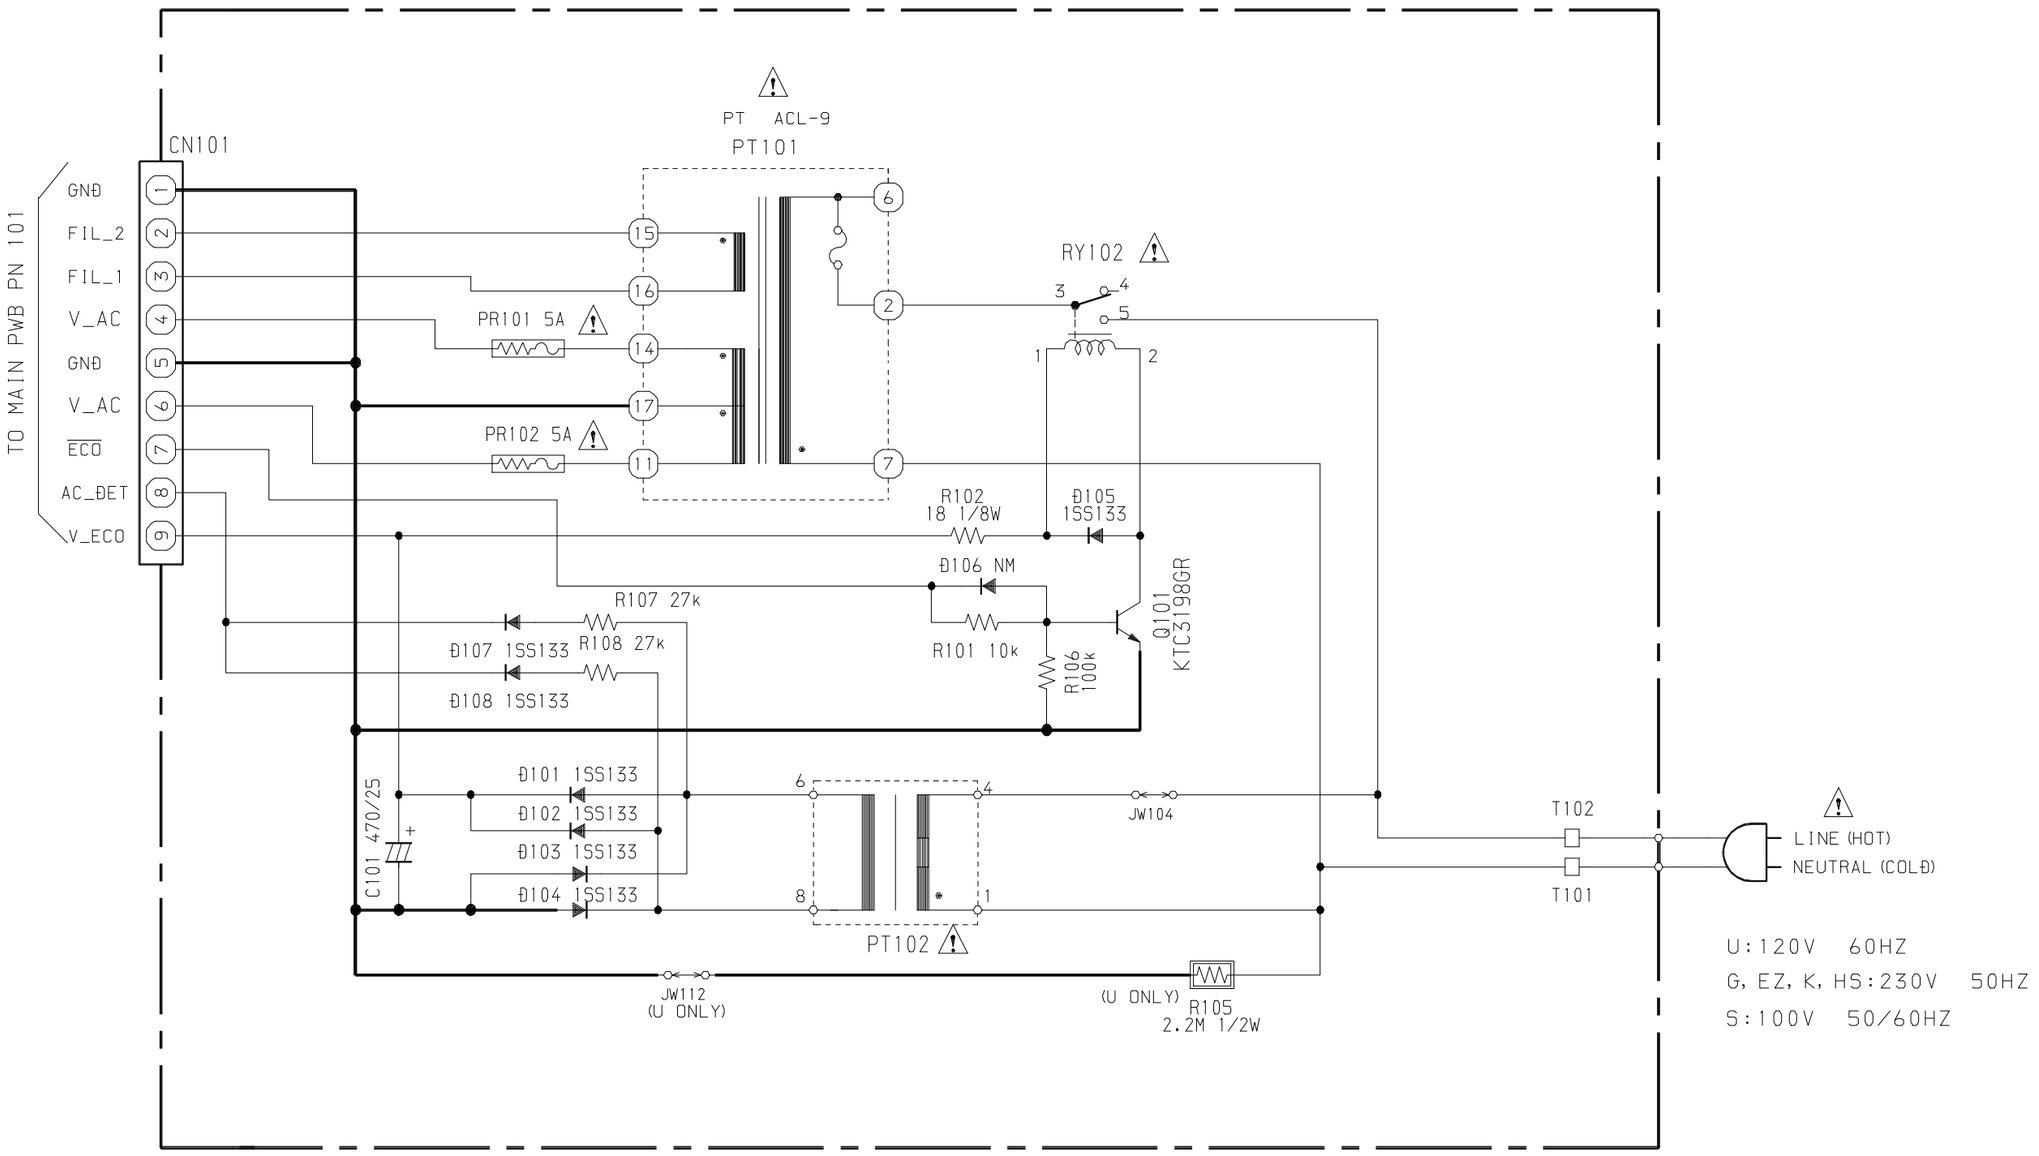

ACL-9/19 U, EZ, K, HS & S SERIES

ĐAVIĐ

SCHEMATIC ĐIAG (PT)

8A CL9 605 01

C0000297

ACL-9/19 XR-M150/130/120

XX 02 00

B-ACL-9PT-U-RNĐ.PT

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111

9820572 Printed in Singapore